


11-16-00

A

PTO/SB/05 (08-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Please type a plus sign (+) inside this box 
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

11/15/00

1996 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.	P04762
First Inventor	Gavlik, et al.
Title	Multitasking Microcontroller for Controlling the Physical Layer of a Network Interface Card and Method of Operation
Express Mail Label No.	EE804530147LS

(Only for new nonprovisional applications under 37 CFR 1.53(b))

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

- ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
- ☐ Applicant claims small entity status.
See 37 CFR 1.27.
- ☒ Specification [Total Pages]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
- ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets]
- Oath or Declaration [Total Pages]
 - ☒ Newly executed (original or copy)
 - ☐ Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 17 completed)
 - ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)
- ☐ Application Data Sheet. See 37 CFR 1.76

- ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - ☐ Computer Readable Form (CRF)
 - Specification Sequence Listing on:
 - ☐ CD-ROM or CD-R (2 copies); or
 - ☐ paper
 - ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

- ☒ Assignment Papers (cover sheet & document(s))
- ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
- ☐ English Translation Document (if applicable)
- ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
- ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
- ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____

Prior application information Examiner _____ Group / Art Unit: _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label  or ☒ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name	John L. Maxin				
Address	National Semiconductor				
	801 East Campbell Road, Suite 525				
City	Richardson	State	TX	Zip Code	75081
Country	USA	Telephone	972-680-4523	Fax	972-680-4515

Name (Print/Type)	William A. Munck	Registration No. (Attorney/Agent)	39,308
Signature		Date	Nov 15, 2000

Burden Hour Statement This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

11/15/00
09/713643
JC715 U.S. PTO

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision.

TOTAL AMOUNT OF PAYMENT (\$ 746.00

Complete if Known

Application Number	
Filing Date	
First Named Inventor	Gavlik, et al.
Examiner Name	
Group Art Unit	
Attorney Docket No.	P04762

METHOD OF PAYMENT

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:
- Deposit Account Number: 140448
- Deposit Account Name: National Semiconductor Corporation
- ☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17
- ☐ Applicant claims small entity status. See 37 CFR 1.27
2. ☐ Payment Enclosed:
- ☐ Check ☐ Credit card ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
101	710	201	355	Utility filing fee	710.00
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	

SUBTOTAL (1) (\$ 710.00

2. EXTRA CLAIM FEES

Total Claims: 22 -20** = 2 X 18.00 = 36.00

Independent Claims: 3 -3** = 0 X 80.00 = 0

Multiple Dependent: None = 0

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
103	18	203	9	Claims in excess of 20	
102	80	202	40	Independent claims in excess of 3	
104	270	204	135	Multiple dependent claim, if not paid	
109	80	209	40	** Reissue independent claims over original patent	
110	18	210	9	** Reissue claims in excess of 20 and over original patent	

SUBTOTAL (2) (\$ 36.00

**or number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES


Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for ex parte reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	710	246	355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1.129(b))	
179	710	279	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify) _____

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$

SUBMITTED BY

Name (Print/Type)	William A. Munck	Registration No. (Attorney/Agent)	39,308	Telephone	214-922-9221
Signature		Date	Nov 15, 2000		

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

CERTIFICATE OF EXPRESS MAIL

I hereby certify that this correspondence, including the attachments listed, is being deposited with the United States Postal Service, Express Mail - Post Office to Addressee, Receipt No. EE804530147US, in an envelope addressed to Commissioner of Patents and Trademarks, Washington, D.C. 20231, on the date shown below.

11/15/00
Date of Mailing

Kathy Longenecker

Typed or printed name of person mailing

Kathy Longenecker
Signature of person mailing

Attachments:

1. Return acknowledgement postcard
2. Utility patent transmittal
3. Fee transmittal
4. 44 pages of the specification - Docket No: P04762
5. 9 sheets of drawings
6. Declaration of 3 inventor(s) Unsigned
7. Recordation form and Assignment(s) from 3 inventor(s) (optional)

JC715 U.S. PTO

09/713643



DOCKET NO. P04762

PATENT

MULTITASKING MICROCONTROLLER FOR CONTROLLING THE
PHYSICAL LAYER OF A NETWORK INTERFACE CARD
AND METHOD OF OPERATION

Inventor(s) :

John E. Gavlik
2540 Greencastle Court
Oxnard
Ventura County
California 93035-2901
United States Citizen

Ted Chang
5355 Oak Park Lane, No. 170
Oak Park
Los Angeles County
California 91377
United States Citizen

Matthew J. Webb
5323 Baza Avenue
Woodland Hills
Los Angeles County
California 91364
Citizen of the United Kingdom

Assignee:

National Semiconductor Corporation
2900 Semiconductor Drive
Santa Clara, California 58090

CERTIFICATE OF EXPRESS MAIL

I hereby certify that this correspondence, including the attachments listed, is being mailed in an envelope addressed to Commissioner of Patents and Trademarks, Washington, DC 20231, using the Express Mail Post Office to Addressee service of the United States Postal Service on the date shown below.

Kathy Longenecker
Printed Name of Person Mailing
Signature of Person Mailing

EE804530147US
Express Mail Receipt No.
Date 11/15/00

William A. Munck
John T. Mockler
Novakov Davis & Munck P.C.
900 Three Galleria Tower
13155 Noel Road
Dallas, Texas 75240
(214) 922-9221

MULTITASKING MICROCONTROLLER FOR CONTROLLING THE
PHYSICAL LAYER OF A NETWORK INTERFACE CARD
AND METHOD OF OPERATION

CROSS-REFERENCE TO RELATED APPLICATIONS

5 The present invention is related to that disclosed in United
States Patent Application Serial No. [ATTY DOCKET NO. P04761],
entitled "NETWORK INTERFACE CARD USING PHYSICAL LAYER
MICROCONTROLLER AND METHOD OF OPERATION" and filed concurrently
herewith. The related application is commonly assigned to the
10 assignee of the present invention. The disclosure of this related
patent application is hereby incorporated by reference into the
present disclosure as if fully set forth herein.

TECHNICAL FIELD OF THE INVENTION

15 The present invention is generally directed to network
interface cards and, more specifically, to a microcontroller
architecture that controls the physical layer of a network
interface card.

BACKGROUND OF THE INVENTION

The demand for high-performance computers and communication devices requires that state-of-the-art networks and network interface devices operate at comparable high-performance levels. The necessary high-performance is provided by network interface cards (NIC) that operate at ever increasing speeds. These network interface cards (NIC) are used in a wide variety of devices, including personal computers, switches, routers, hubs, bridges, and the like. Network interface cards operating at 10 Mbps (i.e., 10BaseT) over Category-3 (CAT3) wires and network cards operating at 100 Mbps (i.e., 100BaseT) over Category-5 (CAT5) are in common use in Ethernet local area network (LAN) environments. Additionally, network interface cards that operate at 1 Gbps (i.e., 1000BaseT) are now coming into use in Gigabit Ethernet LANs.

To achieve the desired high-speed performance, it is essential that the monitoring and control functions of network interface cards operate as real-time functions. Conventional network interface cards obtain real-time performance using hard-wired state machines to control and monitor the internal operations of the physical layer of the network interface cards. In effect, each individual function of the physical layer requires its own state

machine. This allows many functions to operate in parallel at very high speed.

However, the state machine approach has significant drawbacks. If a bug is found in a network card, if an existing function is to be modified, or if a new function is to be added, a new state machine must be designed or an existing state machine must be modified. Thus, a network interface card with hardwired state machine cannot be upgraded or patched and must be replaced. Some network card manufacturers attempt to overcome these drawbacks by using state machines that are at least partially implemented using PAL and PLA circuits. However, the degree to which a PAL or PLA circuit can be reprogrammed or upgraded is relatively limited. Moreover, many manufacturers use dedicated pins to communicate with and reprogram or upgrade the physical layer circuitry in their network interface cards. However, many network interfaces have only a limited number of I/O pins. Dedicating pins for reprogramming or upgrading purposes in these circumstances limits the versatility of a network interface card.

There is therefore a need in the art for improved network interface cards that may be easily upgraded or modified. In particular, there is a need for network interface card that may be upgraded or modified without using dedicated interface pins to

download software patches or reprogram state machines in the network cards. More particularly, there is a need for network interface cards in which the functions of the physical layer circuitry can be monitored and controlled in real time without using hard-wired state machines. There is a still further need for network interface cards in which the physical layer may be easily reprogrammed or upgraded without using PAL or PLA circuits to control state machines.

SUMMARY OF THE INVENTION

To address the above-discussed deficiencies of the prior art, it is a primary object of the present invention to provide an apparatus for controlling a physical layer interface of a network interface card in real time. According to an advantageous embodiment of the present invention, the apparatus comprises: 1) a first memory capable of storing a multitasking control program, the multitasking control program comprising a main routine and a plurality of subroutines callable by the main routine; 2) a second memory capable of storing a plurality of multitasking vectors associated with the multitasking control program; and 3) a microcontroller capable of executing the multitasking control program, wherein program execution control is transferred from the main routine to a first one of the plurality of subroutines when the first subroutine is called by the main routine and wherein the first subroutine, upon encountering a decision point in the first subroutine that is not yet capable of being decided, updates a first one of the plurality of multitasking vectors associated with the first subroutine with an address of the decision point and transfers program execution control back to the main routine.

According to one embodiment of the present invention, the main

routine uses the first multitasking vector to subsequently transfer program execution control back to the first subroutine at the address of the first decision point.

According to another embodiment of the present invention, the first memory comprises a read-only memory (ROM) associated with the microcontroller.

According to still another embodiment of the present invention, the second memory comprises a random access memory (RAM) associated with the microcontroller.

According to yet another embodiment of the present invention, the ROM and the RAM are internal to the microcontroller.

According to a further embodiment of the present invention, at least one of the ROM and the RAM comprises an external device coupled to the microcontroller.

According to a still further embodiment of the present invention, the first memory and the second memory comprise a random access memory (RAM) associated with the microcontroller.

According to a yet further embodiment of the present invention, the RAM comprises an external device coupled to the microcontroller.

The foregoing has outlined rather broadly the features and technical advantages of the present invention so that those skilled

in the art may better understand the detailed description of the invention that follows. Additional features and advantages of the invention will be described hereinafter that form the subject of the claims of the invention. Those skilled in the art should appreciate that they may readily use the conception and the specific embodiment disclosed as a basis for modifying or designing other structures for carrying out the same purposes of the present invention. Those skilled in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the invention in its broadest form.

Before undertaking the DETAILED DESCRIPTION OF THE INVENTION below, it may be advantageous to set forth definitions of certain words and phrases used throughout this patent document: the terms "include" and "comprise," as well as derivatives thereof, mean inclusion without limitation; the term "or," is inclusive, meaning and/or; the phrases "associated with" and "associated therewith," as well as derivatives thereof, may mean to include, be included within, interconnect with, contain, be contained within, connect to or with, couple to or with, be communicable with, cooperate with, interleave, juxtapose, be proximate to, be bound to or with, have, have a property of, or the like; and the term "controller" means any device, system or part thereof that controls at least one

operation, such a device may be implemented in hardware, firmware or software, or some combination of at least two of the same. It should be noted that the functionality associated with any particular controller may be centralized or distributed, whether locally or remotely. Definitions for certain words and phrases are provided throughout this patent document, those of ordinary skill in the art should understand that in many, if not most instances, such definitions apply to prior, as well as future uses of such defined words and phrases.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, wherein like numbers designate like objects, and in which:

FIGURE 1 illustrates an exemplary processing system, namely a personal computer (PC), containing a network interface card (NIC) that incorporates a microcontroller in the physical layer hardware according to the principles of the present invention;

FIGURE 2 illustrates an exemplary network interface card (NIC) in greater detail according to one embodiment of the present invention;

FIGURE 3 illustrates an exemplary microcontroller in the physical layer controller of the network interface card according to one embodiment of the present invention;

FIGURE 4 is an exemplary memory map of the ROM and the RAM in the exemplary microcontroller according to the principles of the present invention;

FIGURE 5 is a flow diagram illustrating the operation of the exemplary network interface card according to one embodiment of the present invention;

FIGURE 6 is a flow diagram illustrating the hierarchy of multitasking routines in the control program that operates the exemplary network interface card according to one embodiment of the present invention; and

5 FIGURES 7-9 illustrate multitasking program flow in three exemplary subroutines according to one embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

FIGURES 1 through 9, discussed below, and the various embodiments used to describe the principles of the present invention in this patent document are by way of illustration only and should not be construed in any way to limit the scope of the invention. Those skilled in the art will understand that the principles of the present invention may be implemented in any suitably arranged network interface device.

FIGURE 1 illustrates an exemplary processing system, namely personal computer (PC) 100, containing a network interface card that incorporates a microcontroller in the physical layer hardware in accordance with the principles of the present invention. Personal computer 100 comprises removable (i.e., floppy) disk drive (FDD) 102 and hard disk drive (HDD) 103, monitor 104, keyboard 105, processor (CPU) 106, main memory 107, a pointing device, such as mouse 108, and network interface card (NIC) 140. Monitor 104, keyboard 105, and mouse 108 may be replaced by, or combined with, other input/output (I/O) devices. Main memory 107 may comprise a volatile storage device, such as a dynamic random access memory (RAM). Processor 106 may comprise an on-board two level cache system, including a Level 1 (L1) cache and a Level 2 (L2) cache.

Keyboard 105 and mouse 108 are coupled to PC 100 via input/output (I/O) interface (IF) 110. Monitor 104 is coupled to PC 100 via video/audio interface (IF) 112. The internal components of PC 100, including floppy disk drive 102, hard disk drive 103, processor 106, main memory 107, I/O interface 110 and video/audio interface 112, are coupled to and communicate across communication bus 115. Communication bus 115 may represent one or more buses in PC 100, including a Peripheral Component Interconnect (PCI) bus. Removable disk drive 102 is capable of reading and writing to removable floppy diskettes. Hard disk drive 105 provides fast access for storage and retrieval of application programs and data.

NIC 140 allows PC 100 to communicate with an external data network, such as a local area network (LAN) in an office. NIC 140 may operate at different speeds according to conditions on the external network. For instance, NIC 140 may operate in 10BaseT, 100BaseT, and 1000BaseT modes in which NIC 140 transfers data at 10 Mbps, 100 Mbps, and 1000 Mbps, respectively. In an advantageous embodiment, hard disk drive 103 stores network interface card (NIC) configuration file 103. As will be explained below in greater detail, NIC configuration file 103 comprises a software control program that may be downloaded into a random access memory (RAM) in the physical layer of NIC 140. A microcontroller according to the

principles of the present invention then executes the downloaded software control program in lieu of the embedded control program stored in read-only memory (ROM) that normally is executed by the microcontroller. In an advantageous embodiment of the present invention, whenever PC 100 is rebooted, software drivers executed by processor 106 retrieve and download the software control program in NIC configuration file 103 to the physical layer microcontroller of NIC 140.

FIGURE 2 illustrates exemplary network interface card (NIC) 140 in greater detail according to one embodiment of the present invention. Network interface card (NIC) 140 comprises 10-100-1000 Ethernet medium access control (MAC) layer controller 210 (hereafter, "MAC layer controller 210"), 10-100-1000 Ethernet physical layer controller 220 (hereafter, "physical layer controller 220"), magnetic (MAG) circuits 230, and connector 240, which may be, for example, an RJ45 connector. MAG circuits 230 comprises coupling transformer coils that transmit high bit-rate signals to, and receive high bit-rate signals from, for example, a Gigabit Ethernet LAN connected to RJ45 connector 240. Network interface card (NIC) 140 may also comprise optional external ROM 260 and optional external RAM 270. In the exemplary embodiment, ROM 260 and RAM 270 are both 16 kilobytes in size.

PC 100 communicates with and controls MAC layer controller 210 and physical layer controller 220 via PCI bus 250. The primary data interface between MAC layer controller 210 and physical layer controller 220 is the Media Independent Interface/Gigabit Media Independent Interface (MII/GMII). In an advantageous embodiment of the present invention, MAC layer controller 210 also communicates with physical layer controller 220 using the Management Data Clock (MDC) and Management Data Input/Output (MDIO) signal lines. The MDC and MDIO interface is a well-known, standardized interface used in most network interface cards to communicate between the MAC layer and the physical layer. In conventional network interface cards, MAC layer controller 210 uses the MDC/MDIO signal lines to access one or more of thirty-two (32) standardized registers (R0 through R31) in physical layer controller 220 for normal configuration and control functions, such as setting the bit rate (e.g., 10BaseT, 100BaseT, 1000BaseT), examining status registers, and the like.

In an exemplary embodiment of the present invention, MAC layer controller 210 may comprise a DP83820 chip from National Semiconductor Corporation and physical layer controller 220 may comprise a DP83861 chip from National Semiconductor Corporation. Those skilled in the art will understand, however, that equivalent

MAC layer and physical layer chips from other manufacturers may readily be adopted for use in accordance with the principles of the present invention.

According to the principles of the present invention, PC 100
5 uses NIC driver software in hard disk drive 103 to download a new software control program from NIC configuration file 103 into physical layer controller 220 after PC 100 is booted up or reset. PC 100 uses MAC layer controller 210 and the MDC/MDIO signal lines to load the new software control program through selected ones of
10 the R0-R31 registers and into random access memory (RAM) in physical layer controller 220. The new software control program is executed in place of the original embedded program in ROM in physical layer controller 220.

FIGURE 3 illustrates exemplary microcontroller 300 in physical
15 layer controller 220 according to one embodiment of the present invention. Microcontroller 300 comprises microcontroller core logic 310, internal read-only memory (ROM) 320, internal random access memory (RAM) 330, management interface logic 340, and registers, peripheral logic 350, optional external ROM 260, and
20 optional external RAM 270. Registers and peripheral logic 350 comprises RS-232 UART 352, computer operating properly (COP) timer 354, general purpose ports 356, and IEEE and expanded

registers 358. Microcontroller core logic 310 is coupled to ROM 320, RAM 330, ROM 260, RAM 270, and registers and peripheral logic 350 by address, data and control busses. Microcontroller core logic 310 also receives interrupt signals from management interface logic 340 and registers and peripheral logic 350.

In an exemplary embodiment of the present invention, microcontroller 300 may comprise a variation of a standard Motorola™ MC68HC11 microcontroller. Those skilled in the art will understand, however, that equivalent microcontrollers from other manufacturers may readily be adopted for use in accordance with the principles of the present invention. Furthermore, in the exemplary embodiment, ROM 320 and RAM 330 are each 16 kilobytes (16K) in size and are internal to microcontroller 300. However, this is by way of illustration only. In alternate embodiments, additional ROM 260 and RAM 270 may be external devices coupled to microcontroller 300 and the size of ROM 320, ROM 260, RAM 330, or RAM 270 also may be smaller or larger than 16 kilobytes.

In an exemplary embodiment, microcontroller core logic 310 comprises a high performance, synthesizable 8-bit CPU core. Microcontroller core logic 310 may implement, for example, the complete Motorola MC68HC11 instruction set and hardware architecture, including a sequencer, instruction decode unit,

arithmetic unit and registers, as well as other support logic. Microcontroller core logic 310 may include an interrupt priority resolution system. In an exemplary embodiment, microcontroller 300 is driven by a 41.667 MHz clock signal.

5 In normal operating modes, microcontroller 300 uses an internal embedded program (i.e., firmware) in ROM 320 to control 10Base-T, 100Base-T and 1000Base-T physical layer functions, as well as RS-232 and management communications with PC 100 and the external network. The ROM 320 firmware may perform the following major functions:

10 Power-On Initialization

 Start Up Configuration

 Main Loop Control

 Test Mode Control

15 Loopback Control

 Auto Negotiation

 10/100/1000 Base PHY-Control

 1000 Base Link Monitor

 RS-232 Serial Communications

20 Management Communications

 LED Illumination Control

 PATCH Routines

Normally, program variables, pointers, multitasking vectors and the stack reside in the 16Kbytes of RAM 320. According to the principles of the present invention, patches, upgrades and enhancements to the software control program may be downloaded as software (as opposed to firmware) that is stored in RAM 320 through management interface logic 340. The downloaded software code also permits the user to conduct extensive testing and debugging using the register interface of microcontroller 300.

RS-232 UART 352 forms a serial I/O (SIO) hardware interface between microcontroller 300 and PC 100. RS-232 UART 352 logic has two functional interfaces: a 2-wire link (RX and TX) to external host PC 100 and a 4 byte-wide data paths to microcontroller core logic 310. The TX and RX signals form a conventional RS-232 asynchronous communication link. Serial data can be transferred to and from PC 100 in full-duplex mode at one of four standard baud rates (115,200, 57,600, 38,400 and 19,200). Each serial data word is composed of a start bit, 8 data bits and one stop bit. Since this is a universally accepted asynchronous serial data format, it ensures that any terminal program resident on PC 100 can transmit and receive serial data to and from RS-232 UART 352 at the standard baud rates.

Computer operating properly (COP) timer 354 has two basic

functions: 1) to issue an interrupt if, and when, it is not properly serviced by firmware; and 2) to act as a general-purpose event timer for any firmware or software routine. At the core of COP timer 354 is a 26-bit free-running binary up counter that is incremented on each positive-going edge of the 41.67 MHz microcontroller clock. At a clock rate of 41.67 MHz, 26 bits are necessary due to the fact that microcontroller 300 may time events over 1.5 seconds.

The primary function of COP timer 354 is to indirectly detect software errors by timing out. Therefore, if the firmware and/or software are functioning correctly, COP timer 354 is periodically reset thus keeping it from timing out. Resetting COP timer 354 is accomplished by writing a Logic 1 to bit 0 of a COP control register. The Logic 1 write to this register is self clearing and COP timer 354 resumes counting from zero on the next positive-going edge of the 41.67 MHz microcontroller clock.

If COP timer 354 does time out, it is an indication that the firmware or software is no longer being executed in the intended manner. If a time-out occurs, COP timer 354 issues a non-maskable interrupt to microcontroller core logic 310 that resets the microcontroller firmware code back to a power-on reset condition. In addition to its primary watchdog function, COP timer 354 may

also be used as a general-purpose event timer. Since COP timer 354 is 26 bits in length and increments on each positive-going edge of the 41.67 MHz clock, microcontroller 300 can time events as long as 1.6 seconds.

5 IEEE and expanded registers 358 allow PC 100 to access the internal workings of microcontroller 300. In an exemplary embodiment, IEEE and expanded registers 358 are organized as 256 register files (RF0 through RF255) with each register file consisting of 64 bytes. Although all 256 register files may not
10 used, unused registers allow future functions to be added to the operation of microcontroller 300. Most individual registers exist in internal RAM with the exception of certain hardware-based registers normally located in RF0 through RF3.

15 Management interface logic 340 communicates with PCI bus 250 or PC 100 via the serial bit stream MDIO and the clock MDC with a specified frame structure and protocol as defined below:

Frame Unit	Format	Bits	Driver	Definition
Preamble	111...1	32	STA	A Preamble may be sent at the beginning of each transaction, consisting of 32 contiguous logic ones; this is optional
Start of Frame	01	2	STA	A '01' delimiter initiates the transaction
Operation Code	CC	2	STA	Read (10) or Write (01)
PHY Address	AAAAA	5	STA	A 5-bit PHY address with MSB first
Register Address	RRRRR	5	STA	A 5-bit register address with MSB first
Turn Around	NN	2	STA	A 2-bit turnaround time to avoid contention during Reads. Read (1Z) or Write (01)
Data	DDD...D	16	STA/ PHY	16-bits of data (MSB first) driven by the PHY on Read transactions or the STA on Write transactions
Idle	ZZZ...Z	>=0	STA	The idle condition is a high-impedance state. The PHY pulls-up the MDIO line to a logic one. No Idles are actually required

Using the above protocol, data can be read from or written into the registers of microcontroller 300 and RAM 330.

In conventional network interface cards, the MDC/MDIO interface is intended to access only thirty-two, 16-bit registers

in register file 0 (RF0) of IEEE and expanded registers 358. However, the present invention expands the use of this interface to incorporate reading and writing the entire 64K-memory space of microcontroller 300 via a direct memory access (DMA) hardware mechanism built into management interface logic 340. This expanded feature permits downloading new multi-tasking firmware into RAM 330 for the purpose of bug fixing, adding enhancements and internal diagnostics.

An expanded management interface according to the principles of the present invention can be viewed as having two modes of operation - base mode and expanded mode. Base mode management access can be described as a 16-bit read or write access to any register from register 0 (R0) to register 31 (R31) in the RF0 (base) register space. Expanded mode management accesses uses four (4) unused base mode registers as portals to the entire 64Kbyte register and memory space of microcontroller 300.

Expanded mode management access uses the following registers:

- | | | | |
|----|---------|------|--------------|
| 1) | RF0.R22 | 0x16 | Mode_Port |
| 2) | RF0.R29 | 0x1D | Data_Port |
| 3) | RF0.R30 | 0x1E | Addr_Port |
| 4) | RF0.R31 | 0x1F | JMP_JSR_Port |

and operates in the following four modes:

Mode 1 (8-bit access):

- 1 First write to the Addr_Port to setup the 16-bit address pointer.
- 2a For one or more Read cycles:
 - i) Read the Data_Port.
 - ii) The 8-bit data pointed to by the Addr_Port is placed in the LSB of the frame.
 - iii) Addr_Port <= Addr_Port+1
- 2b For one or more Write cycles:
 - i) Write the Data_Port.
 - ii) The 8-bit data in the LSB of the frame is written at the Addr_Port.
 - iii) Addr_Port <= Addr_Port+1
- 3 Repeat 2a or 2b for more data transfers.

Mode 2 (16-bit access):

- 1 First write to the Addr_Port to setup the 16-bit address pointer.
- 2a For one or more Read cycles:
 - i) Read the Data_Port
 - ii) The 16-bit data pointed to by the Addr_Port is placed in the MSB & LSB of the frame.

iii) Addr_Port <= Addr_Port+2

2b For one or more Write cycles:

i) Write the Data_Port

ii) The 16-bit data in the MSB and LSB of the frame is written at the Addr_Port.

iii) Addr_Port <= Addr_Port+2

3 Repeat 2a or 2b for more data transfers.

Mode 3 (addr/data-bundled write-only access):

1 i) First write to the Addr_Port to setup the MSB of the 16-bit address pointer (LSB is ignored).

2 ii) Write to Data_Port.

iii) The MSB of the frame contains the LSB of the address pointer.

iv) The LSB of the frame contains the data to be written.

3 Repeat 2 for more writes.

Mode 4 (JMP or JSR and execute):

1 Write a 16-bit address to the JMP_JSR_Port.

2 Program execution is immediately transferred to the previously downloaded code beginning at the JMP_JSR_Port address.

Register RF0.R22 controls the selection of modes 1, 2 and 3 above. Following a hard reset, mode 3 is the default mode. Mode 4 is entered by directly writing a 16-bit address to the JMP_JSR_Port.

5 FIGURE 4 is an exemplary memory map of ROM 320 and RAM 330 according to the principles of the present invention. RAM 330A illustrates the typical contents of RAM 330 if a software patch or upgraded or enhanced software control program is not downloaded into RAM 330. RAM 330B illustrates the typical contents of RAM 330 if a software patch or upgraded or enhanced software control program is downloaded into RAM 330.

10 In the exemplary embodiment, ROM 320 stores program code in the address space from 0xC000 to 0xFBCF. ROM 320 stores interrupt vectors and interrupt service routines in the address space from 0xFBD0 to 0xFFFF. If code is running in ROM 320, RAM 330A stores pointers, variable and user-defined code used by the embedded program in ROM 320 in the address space from 0x8000 to 0x83FF. RAM 330A may also store patch code and additional variables in the address space from 0x8400 to 0xBF7F. The address space from 0xBF80 to 0xBFFF holds the stack used by the embedded program in ROM 320.

20 However, if an upgrade or an enhancement to the software control program is downloaded to RAM 330, the program code in

ROM 320 will run until branching to the address in RAM 330B specified by JMP_JSR_Port in register RF0.R31. RAM 330B stores pointers, variable and user-defined code used by the downloaded software program code in RAM 330 in the address space from 0x8000 to 0x83FF. The software program itself is stored in RAM 330B in the address space from 0x8400 to 0x9DCF. RAM 330B stores interrupt service routines in the address space from 0x9F00 to 0xA0FF. RAM 330B stores patch code and additional variables in the address space from 0xA100 to 0xBF7F. The address space from 0xBF80 to 0xBFFF holds the stack used by the downloaded software program in RAM 330B.

FIGURE 5 depicts flow diagram 500, which illustrates the operation of exemplary network interface card 140 according to one embodiment of the present invention. After a reboot or initial start up of PC 100, PC 100 executes software drivers that retrieve an upgraded or enhanced software control program, or error corrections for the software control program from NIC configuration file 150 in hard disk drive 103 (process step 505). Next, PC 100 downloads the new software control program to microcontroller 300 in the physical layer of NIC 140 using the standard MDC and MDIO signal lines. The new software control program is stored in RAM 330 (process step 510).

Microcontroller 300 then begins to run the embedded program in ROM 320. However, when PC 100 writes a 16-bit value to the JMP_JSR_Port RAM address in RF0.R31, the embedded program immediately jumps to the RAM address specified by JMP_JSR_Port. Thereafter, program control is transferred to the downloaded software control program in RAM 330 beginning at the JMP_JSR_Port address (process step 515). At this point, NIC 140 begins to operate under the control of the new software control program (process step 520).

As mentioned previously, manufacturers of conventional network interface cards traditionally rely on state machines to control the functions of the physical layer of the NIC. One of the overriding reasons for this is the ability of individual state machines to execute in parallel. Microcontrollers have not been used in the prior art network interface cards because of the sequential nature of microcontrollers.

In considering the incorporation of microcontroller 300 in the physical layer of NIC 140, it is equally necessary to consider a non-conventional (i.e., non-sequential) embedded control program (or downloaded software control program) to control the operations of microcontroller 300. Conventional (sequential) control programs are far too slow for monitoring and controlling the real-time

functions of NIC 140. It is therefore necessary to incorporate a multi-tasking capability that can service the functions of microcontroller 300 in a real-time manner.

The ability to download an updated multi-tasking software control program into RAM 330 permits correction and optimization of functions without having to resort to re-fabrication every time a change or enhancement is needed or desired. The ability to multi-task the embedded control program or the software control program using an off-the-shelf microcontroller core is key to cost-effectively controlling the real-time operation of NIC 140. Furthermore, programming a standard microcontroller using an industry standard programming language and compiler is far easier to accomplish and test as compared with designing, simulating and testing equivalent hardware state machines.

FIGURE 6 depicts flow diagram 600, which illustrates the hierarchy of multitasking routines in the control program that operates exemplary network interface card 140 according to one embodiment of the present invention. Multitasking may be performed by the original embedded control program in ROM 320 or by the new downloaded software control program in RAM 330, or both. The majority of the physical layer operations in NIC 140 may be monitored and controlled by the embedded control program, which

resides in 16K of internal ROM 320. Additionally, a downloaded software control program in internal or external RAM, or both, may run independently, or together with, the ROM-based embedded control program. PC 100 may download a software control program through management interface logic 340. A downloaded software control program is normally used for testing, debugging, data logging, bug fixing and adding enhancements.

Since microcontroller 300 is essentially a sequential processor, the present invention uses a method of multi-tasking to accommodate servicing the multiple routines illustrated in FIGURE 6. Microcontroller 300 executes main routine 605, which may may branch to any one of subroutines 610, 615, 620, 625, and 630, which are arbitrarily labeled Subroutine 1, Subroutine 2, Subroutine 3, Subroutine 4, and Subroutine 5, respectively. Main routine 605 operates as a top-level executive routine. Main routine 605 calls each of the major subroutines, including subroutines 610, 615, 620, 625, and 630, in order to give each subroutine an opportunity to complete a portion of its tasks.

At the most basic level, all subroutines in an embedded control program or in a downloaded software control program share the same sequential flow, which can generally be described as a sequence of instructions that perform some process followed by a

decision block, followed by additional processes and decisions. Without multitasking, normal program flow in any given subroutine may be suspended in a loop in a decision block for an indefinite period of time. An example of this type of event is waiting for a timer to expire or waiting for a particular signal to go true or false. In either case, other subroutines cannot be serviced during the stall period, unless some form of multitasking is implemented.

Multitasking in microcontroller 300 is done by using a series of pointers called multitasking vectors (or MTVs) which reside in RAM 330. Each one of subroutines 610, 615, 620, 625, and 630 has its own MTV and at Power ON, the control program initializes the MTV of each subroutine to point to the beginning of that subroutine. As each subroutine executes, it updates its own MTV. When the subroutine comes to a decision point that cannot be immediately satisfied (such as waiting for a timer to expire), the subroutine leaves its MTV pointing to the beginning of the decision loop and returns to the calling routine (e.g., main routine 605). The next subroutine in sequence is then serviced. The next time the original subroutine is serviced, it begins processing at the last MTV address position.

FIGURES 7-9 illustrate multitasking program flow in three exemplary subroutines, namely subroutines 610, 615, and 620 (i.e.,

Subroutines 1, 2 and 3), according to one embodiment of the present invention. Subroutine 1 comprises a sequence of processes (Processes 1-5) separated by decision blocks (Decisions 1-4). Similarly, Subroutine 2 and Subroutine 3 also comprise a sequence of processes (Processes 1-5) separated by decision blocks (Decisions 1-4).

Microcontroller 300 begins processing Subroutine 1 by first completing Process 1. When Process 1 is complete, Subroutine 1 moves its Multi-Tasking Vector, MTV1, to the beginning of Decision 1. Assuming that Decision 1 cannot be immediately completed, Subroutine 1 then leaves MTV1 pointing to the beginning of Decision 1, and the control program begins processing Subroutine 2 starting from Process 1.

Process 1 in Subroutine 2 completes and the control program moves MTV2 to the beginning of Decision 1. Again, for purposes of example, Decision 1 cannot be completed immediately, so Subroutine 2 leaves MTV2 pointing to the beginning of Decision 1. The control program then begins processing Subroutine 3. Subroutine 3 executes Process 1 and encounters Decision 1, which cannot be immediately satisfied. This process continues until program control eventually comes back to Subroutines 1, 2 and 3.

Moving forward in time, FIGURE 8 shows the positions of MTV1,

MTV2 and MTV3 in their respective subroutines. As can be seen, Subroutine 1 has progressed to Decision 2, while Subroutine 2 is still waiting for Decision 1 to complete. Subroutine 3 has progressed to Decision 3. Again moving forward in time, FIGURE 9 shows the positions of MTV1, MTV2 and MTV3 in their respective subroutines. Subroutine 1 has progressed to Decision 3, Subroutine 2 has progressed to Decision 2, and Subroutine 3 has progressed to Decision 4. Advantageously, microcontroller 300 spends very little time in each of Subroutines 1, 2 and 3 testing for a decision. Rather, microcontroller 300 rapidly moves from subroutine to subroutine, all the while maintaining the real-time integrity of each subroutine.

An important subset of multitasking subroutines are patch routines. According to an advantageous embodiment of the present invention, patch routines are the preferred way to download a customized software control program to modify the programmatic flow of the ROM-based embedded software control program. As the name implies, a patch routine allows the user to patch together or patch around portions of an existing embedded ROM control program. Patch routines can also stand alone as separate callable subroutines not related to any existing embedded control program function.

In an exemplary embodiment of the present invention, patch

5 routines may be implemented using MTV patch flags. From either Power ON or a manual reset, microcontroller 300 clears to all zeroes 32 MTV patch flags, which are organized in four contiguous bytes in internal RAM 330. The MTV patch flags are the turn ON or Turn OFF mechanism for their related patch routines. That is, the user may download from 1 to 32 patch routines into internal or external RAM (e.g., RAM 330) and by setting or resetting any of the 32 MTV patch flags, activate or deactivate any of the related patch routines.

10 Provisions are made for each of the 32 patch routines to have a multitasking vector (MTV) exactly like a normal embedded control program subroutine. Each patch routine may or may not be called from main routine 605, depending on the state of its MTV patch flag. Patch routines are constructed exactly like any other multitasking control program routine, except that all patch routines are actually callable subroutines that have an RTS (Return From Subroutine) as the last instruction. In an exemplary embodiment of the present invention, patch routines may be created and assembled in 68HC11 assembly language and then downloaded into RAM 330 via management interface logic 340.

20 Although the present invention has been described in detail, those skilled in the art should understand that they can make

various changes, substitutions and alterations herein without departing from the spirit and scope of the invention in its broadest form.

WHAT IS CLAIMED IS:

1 1. An apparatus for controlling a physical layer interface
2 of a network interface card in real time, said apparatus
3 comprising:

4 a first memory capable of storing a multitasking control
5 program, said multitasking control program comprising a main
6 routine and a plurality of subroutines callable by said main
7 routine;

8 a second memory capable of storing a plurality of
9 multitasking vectors associated with said multitasking control
10 program; and

11 a microcontroller capable of executing said multitasking
12 control program,

13 wherein program execution control is transferred from
14 said main routine to a first one of said plurality of subroutines
15 when said first subroutine is called by said main routine and
16 wherein said first subroutine, upon encountering a decision point
17 in said first subroutine that is not yet capable of being decided,
18 updates a first one of said plurality of multitasking vectors
19 associated with said first subroutine with an address of said
20 decision point and transfers program execution control back to said
21 main routine.

1 2. The apparatus as set forth in Claim 1 wherein said main
2 routine uses said first multitasking vector to subsequently
3 transfer program execution control back to said first subroutine at
4 said address of said first decision point.

1 3. The apparatus as set forth in Claim 2 wherein said first
2 memory comprises a read-only memory (ROM) associated with said
3 microcontroller.

1 4. The apparatus as set forth in Claim 3 wherein said second
2 memory comprises a random access memory (RAM) associated with said
3 microcontroller.

1 5. The apparatus as set forth in Claim 4 wherein said ROM
2 and said RAM are internal to said microcontroller.

1 6. The apparatus as set forth in Claim 4 wherein at least
2 one of said ROM and said RAM comprises an external device coupled
3 to said microcontroller.

1 7. The apparatus as set forth in Claim 2 wherein said first
2 memory and said second memory comprise a random access memory (RAM)
3 associated with said microcontroller.

1 8. The apparatus as set forth in Claim 7 wherein said RAM
2 comprises an external device coupled to said microcontroller.

1 9. A processing system comprising:

2 a data processor;

3 a network interface card for coupling said processing
4 system to a data network, said network interface card comprising an
5 apparatus for controlling a physical layer interface of said
6 network interface card in real time, said apparatus comprising:

7 a first memory capable of storing a multitasking
8 control program, said multitasking control program comprising
9 a main routine and a plurality of subroutines callable by said
10 main routine;

11 a second memory capable of storing a plurality of
12 multitasking vectors associated with said multitasking control
13 program; and

14 a microcontroller capable of executing said
15 multitasking control program,

16 wherein program execution control is transferred
17 from said main routine to a first one of said plurality of
18 subroutines when said first subroutine is called by said main
19 routine and wherein said first subroutine, upon encountering
20 a decision point in said first subroutine that is not yet
21 capable of being decided, updates a first one of said
22 plurality of multitasking vectors associated with said first

23 subroutine with an address of said decision point and
24 transfers program execution control back to said main routine.

1 10. The processing system as set forth in Claim 9 wherein
2 said main routine uses said first multitasking vector to
3 subsequently transfer program execution control back to said first
4 subroutine at said address of said first decision point.

150
24
34
44
54
64
74
84
94
104
114
124
134
144
154
164
174
184
194
204
214
224
234
244
254
264
274
284
294
304
314
324
334
344
354
364
374
384
394
404
414
424
434
444
454
464
474
484
494
504
514
524
534
544
554
564
574
584
594
604
614
624
634
644
654
664
674
684
694
704
714
724
734
744
754
764
774
784
794
804
814
824
834
844
854
864
874
884
894
904
914
924
934
944
954
964
974
984
994
1004
1014
1024
1034
1044
1054
1064
1074
1084
1094
1104
1114
1124
1134
1144
1154
1164
1174
1184
1194
1204
1214
1224
1234
1244
1254
1264
1274
1284
1294
1304
1314
1324
1334
1344
1354
1364
1374
1384
1394
1404
1414
1424
1434
1444
1454
1464
1474
1484
1494
1504
1514
1524
1534
1544
1554
1564
1574
1584
1594
1604
1614
1624
1634
1644
1654
1664
1674
1684
1694
1704
1714
1724
1734
1744
1754
1764
1774
1784
1794
1804
1814
1824
1834
1844
1854
1864
1874
1884
1894
1904
1914
1924
1934
1944
1954
1964
1974
1984
1994
2004
2014
2024
2034
2044
2054
2064
2074
2084
2094
2104
2114
2124
2134
2144
2154
2164
2174
2184
2194
2204
2214
2224
2234
2244
2254
2264
2274
2284
2294
2304
2314
2324
2334
2344
2354
2364
2374
2384
2394
2404
2414
2424
2434
2444
2454
2464
2474
2484
2494
2504
2514
2524
2534
2544
2554
2564
2574
2584
2594
2604
2614
2624
2634
2644
2654
2664
2674
2684
2694
2704
2714
2724
2734
2744
2754
2764
2774
2784
2794
2804
2814
2824
2834
2844
2854
2864
2874
2884
2894
2904
2914
2924
2934
2944
2954
2964
2974
2984
2994
3004
3014
3024
3034
3044
3054
3064
3074
3084
3094
3104
3114
3124
3134
3144
3154
3164
3174
3184
3194
3204
3214
3224
3234
3244
3254
3264
3274
3284
3294
3304
3314
3324
3334
3344
3354
3364
3374
3384
3394
3404
3414
3424
3434
3444
3454
3464
3474
3484
3494
3504
3514
3524
3534
3544
3554
3564
3574
3584
3594
3604
3614
3624
3634
3644
3654
3664
3674
3684
3694
3704
3714
3724
3734
3744
3754
3764
3774
3784
3794
3804
3814
3824
3834
3844
3854
3864
3874
3884
3894
3904
3914
3924
3934
3944
3954
3964
3974
3984
3994
4004
4014
4024
4034
4044
4054
4064
4074
4084
4094
4104
4114
4124
4134
4144
4154
4164
4174
4184
4194
4204
4214
4224
4234
4244
4254
4264
4274
4284
4294
4304
4314
4324
4334
4344
4354
4364
4374
4384
4394
4404
4414
4424
4434
4444
4454
4464
4474
4484
4494
4504
4514
4524
4534
4544
4554
4564
4574
4584
4594
4604
4614
4624
4634
4644
4654
4664
4674
4684
4694
4704
4714
4724
4734
4744
4754
4764
4774
4784
4794
4804
4814
4824
4834
4844
4854
4864
4874
4884
4894
4904
4914
4924
4934
4944
4954
4964
4974
4984
4994
5004
5014
5024
5034
5044
5054
5064
5074
5084
5094
5104
5114
5124
5134
5144
5154
5164
5174
5184
5194
5204
5214
5224
5234
5244
5254
5264
5274
5284
5294
5304
5314
5324
5334
5344
5354
5364
5374
5384
5394
5404
5414
5424
5434
5444
5454
5464
5474
5484
5494
5504
5514
5524
5534
5544
5554
5564
5574
5584
5594
5604
5614
5624
5634
5644
5654
5664
5674
5684
5694
5704
5714
5724
5734
5744
5754
5764
5774
5784
5794
5804
5814
5824
5834
5844
5854
5864
5874
5884
5894
5904
5914
5924
5934
5944
5954
5964
5974
5984
5994
6004
6014
6024
6034
6044
6054
6064
6074
6084
6094
6104
6114
6124
6134
6144
6154
6164
6174
6184
6194
6204
6214
6224
6234
6244
6254
6264
6274
6284
6294
6304
6314
6324
6334
6344
6354
6364
6374
6384
6394
6404
6414
6424
6434
6444
6454
6464
6474
6484
6494
6504
6514
6524
6534
6544
6554
6564
6574
6584
6594
6604
6614
6624
6634
6644
6654
6664
6674
6684
6694
6704
6714
6724
6734
6744
6754
6764
6774
6784
6794
6804
6814
6824
6834
6844
6854
6864
6874
6884
6894
6904
6914
6924
6934
6944
6954
6964
6974
6984
6994
7004
7014
7024
7034
7044
7054
7064
7074
7084
7094
7104
7114
7124
7134
7144
7154
7164
7174
7184
7194
7204
7214
7224
7234
7244
7254
7264
7274
7284
7294
7304
7314
7324
7334
7344
7354
7364
7374
7384
7394
7404
7414
7424
7434
7444
7454
7464
7474
7484
7494
7504
7514
7524
7534
7544
7554
7564
7574
7584
7594
7604
7614
7624
7634
7644
7654
7664
7674
7684
7694
7704
7714
7724
7734
7744
7754
7764
7774
7784
7794
7804
7814
7824
7834
7844
7854
7864
7874
7884
7894
7904
7914
7924
7934
7944
7954
7964
7974
7984
7994
8004
8014
8024
8034
8044
8054
8064
8074
8084
8094
8104
8114
8124
8134
8144
8154
8164
8174
8184
8194
8204
8214
8224
8234
8244
8254
8264
8274
8284
8294
8304
8314
8324
8334
8344
8354
8364
8374
8384
8394
8404
8414
8424
8434
8444
8454
8464
8474
8484
8494
8504
8514
8524
8534
8544
8554
8564
8574
8584
8594
8604
8614
8624
8634
8644
8654
8664
8674
8684
8694
8704
8714
8724
8734
8744
8754
8764
8774
8784
8794
8804
8814
8824
8834
8844
8854
8864
8874
8884
8894
8904
8914
8924
8934
8944
8954
8964
8974
8984
8994
9004
9014
9024
9034
9044
9054
9064
9074
9084
9094
9104
9114
9124
9134
9144
9154
9164
9174
9184
9194
9204
9214
9224
9234
9244
9254
9264
9274
9284
9294
9304
9314
9324
9334
9344
9354
9364
9374
9384
9394
9404
9414
9424
9434
9444
9454
9464
9474
9484
9494
9504
9514
9524
9534
9544
9554
9564
9574
9584
9594
9604
9614
9624
9634
9644
9654
9664
9674
9684
9694
9704
9714
9724
9734
9744
9754
9764
9774
9784
9794
9804
9814
9824
9834
9844
9854
9864
9874
9884
9894
9904
9914
9924
9934
9944
9954
9964
9974
9984
9994
10004
10014
10024
10034
10044
10054
10064
10074
10084
10094
10104
10114
10124
10134
10144
10154
10164
10174
10184
10194
10204
10214
10224
10234
10244
10254
10264
10274
10284
10294
10304
10314
10324
10334
10344
10354
10364
10374
10384
10394
10404
10414
10424
10434
10444
10454
10464
10474
10484
10494
10504
10514
10524
10534
10544
10554
10564
10574
10584
10594
10604
10614
10624
10634
10644
10654
10664
10674
10684
10694
10704
10714
10724
10734
10744
10754
10764
10774
10784
10794
10804
10814
10824
10834
10844
10854
10864
10874
10884
10894
10904
10914
10924
10934
10944
10954
10964
10974
10984
10994
11004
11014
11024
11034
11044
11054
11064
11074
11084
11094
11104
11114
11124
11134
11144
11154
11164
11174
11184
11194
11204
11214
11224
11234
11244
11254
11264
11274
11284
11294
11304
11314
11324
11334
11344
11354
11364
11374
11384
11394
11404
11414
11424
11434
11444
11454
11464
11474
11484
11494
11504
11514
11524
11534
11544
11554
11564
11574
11584
11594
11604
11614
11624
11634
11644
11654
11664
11674
11684
11694
11704
11714
11724
11734
11744
11754
11764
11774
11784
11794
11804
11814
11824
11834
11844
11854
11864
11874
11884
11894
11904
11914
11924
11934
11944
11954
11964
11974
11984
11994
12004
12014
12024
12034
12044
12054
12064
12074
12084
12094
12104
12114
12124
12134
12144
12154
12164
12174
12184
12194
12204
12214
12224
12234
12244
12254
12264
12274
12284
12294
12304
12314
12324
12334
12344
12354
12364
12374
12384
12394
12404
12414
12424
12434
12444
12454
12464
12474
12484
12494
12504
12514
12524
12534
12544
12554
12564
12574
12584
12594
12604
12614
12624
12634
12644
12654
12664
12674
12684
12694
12704
12714
12724
12734
12744
12754
12764
12774
12784
12794
12804
12814
12824
12834
12844
12854
12864
12874
12884
12894
12904
12914
12924
12934
12944
12954
12964
12974
12984
12994
13004
13014
13024
13034
13044
13054
13064
13074
13084
13094
13104
13114
13124
13134
13144
13154
13164
13174
13184
13194
13204
13214
13224
13234
13244
13254
13264
13274
13284
13294
13304
13314
13324
13334
13344
13354
13364
13374
13384
13394
13404
13414
13424
13434
13444
13454
13464
13474
13484
13494
13504
13514
13524
13534
13544
13554
13564
13574
13584
13594
13604
13614
13624
13634
13644
13654
13664
13674
13684
13694
13704
13714
13724
13734
13744
13754
13764
13774
13784
13794
13804
13814
13824
13834
13844
13854
13864
13874
13884
13894
13904
13914
13924
13934
13944
13954
13964
13974
13984
13994
14004
14014
14024
14034
14044
14054
14064
14074
14084
14094
14104
14114
14124
14134
14144
14154
14164
14174
14184
14194
14204
14214
14224
14234
14244
14254
14264
14274
14284
14294
14304
14314
14324
14334
14344
14354
14364
14374
14384
14394
14404
14414
14424
14434
14444
14454
14464
14474
14484
14494
14504
14514
14524
14534
14544
14554
14564
14574
14584
14594
14604
14614
14624
14634
14644
14654
14664
14674
14684
14694
14704
14714
14724
14734
14744
14754
14764
14774
14784
14794
14804
14814
14824
14834
14844
14854
14864
14874
14884
14894
14904
14914
14924
14934
14944
14954
14964
14974
14984
14994
15004
15014
15024
15034
15044
15054
15064
15074
15084
15094
15104
15114
15124
15134
15144
15154
15164
15174
15184
15194
15204
15214
15224
15234
15244
15254
15264
15274
15284
15294
15304
15314
15324
15334
15344
15354
15364
15374
15384
15394
15404
15414
15424
15434
15444
15454
15464
15474
15484
15494
15504
15514
15524
15534
15544
15554
15564
15574
15584
15594
15604
15614
15624
15634
15644
15654
15664
15674
15684
15694
15704
15714
15724
15734
15744
15754
15764
15774
15784
15794
15804
15814
15824
15834
15844
15854
15864
15874
15884
15894
15904
15914
15924
15934
15944
15954
15964
15974
15984
15994
16004
16014
16024
16034
16044
16054
16064
16074
16084
16094
16104
16114
16124
16134
16144
16154
16164
16174
16184
16194
16204
16214
16224
16234
16244
16254
16264
16274
16284
16294
16304
16314
16324
16334
16344
16354
16364
16374
16384
16394
16404
16414
16424
16434
16444
16454
16464
16474
16484
16494
16504
16514
16524
16534
16544
16554
16564
16574
16584
16594
16604
16614
16624
16634
16644
16654
16664
16674
16684
16694
16704
16714
16724
16734
16744
16754
16764
16774
16784
16794
16804
16814
16824
16834
16844
16854
16864
16874
16884
16894
16904
16914
16924
16934
16944
16954
16964
16974
16984
16994
17004
17014
17024
17034
17044
17054
17064
17074
17084
17094
17104
17114
17124
17134
17144
17154
17164
17174
17184
17194
17204
17214
17224
17234
17244
17254
17264
17274
17284
17294
17304
17314
17324
17334
17344
17354
17364
17374
17384
17394
17404
17414
17424
17434
17444
17454
17464
17474
17484
17494
17504
17514
17524
17534
17544
17554
17564
17574
17584
17594
17604
17614
17624
17634
17644
17654
17664
17674
17684
17694
17704
17714
17724
17734
17744
17754
17764
17774
17784
17794
17804
17814
17824
17834
17844
17854
17864
17874
17884
17894
17904
17914
17924
17934
17944
17954
17964
17974
17984
17994
18004
18014
18024
18034
18044
18054
18064
18074
18084
18094
18104
18114
18124
18134
18144
18154
18164
18174
18184
18194
18204
18214
18224
18234
18244
18254
18264
18274
18284
18294
18304
18314
18324
18334
18344
18354
18364
18374
18384
18394
18404
18414
18424
18434
18444
18454
18464
18474
18484
18494
18504
18514
18524
18534
18544
18554
18564
18574
18584
18594
18604
18614
18624
18634
18644
18654
18664
18674
18684
18694
18704
18714
18724
18734
18744
18754
18764
18774
18784
18794
18804
18814
18824
18834
18844
18854
18864
18874
18884
18894
18904

1 14. The processing system as set forth in Claim 12 wherein at
2 least one of said ROM and said RAM comprises an external device
3 coupled to said microcontroller.

1 15. The processing system as set forth in Claim 10 wherein
2 said first memory and said second memory comprise a random access
3 memory (RAM) associated with said microcontroller.

1 16. The processing system as set forth in Claim 15 wherein
2 said RAM comprises an external device coupled to said
3 microcontroller.

1 17. For use in a network interface card having a physical
2 layer interface controllable by a microcontroller embedded therein,
3 a method of operating the microcontroller comprising the steps of:

4 storing a multitasking control program, the multitasking
5 control program comprising a main routine and a plurality of
6 subroutines callable by the main routine;

7 storing a plurality of multitasking vectors associated
8 with the multitasking control program; and

9 executing the multitasking control program in s
10 microcontroller;

11 transferring program execution control from the main
12 routine to a first one of the plurality of subroutines when the
13 first subroutine is called by the main routine;

14 when the first subroutine encounters a decision point in
15 the first subroutine that is not yet capable of being decided,
16 updating a first one of the plurality of multitasking vectors
17 associated with the first subroutine with an address of the
18 decision point; and

19 transferring program execution control back to the main
20 routine.

1 18. The method as set forth in Claim 17 further comprising
2 the step of using the first multitasking vector to subsequently
3 transfer program execution control from the main routine back to
4 the first subroutine at the address of the first decision point.

1 19. The method as set forth in Claim 18 wherein the first
2 memory comprises a read-only memory (ROM) associated with the
3 microcontroller.

1 20. The method as set forth in Claim 19 wherein the second
2 memory comprises a random access memory (RAM) associated with the
3 microcontroller.

1 21. The method as set forth in Claim 20 wherein the ROM and
2 the RAM are internal to the microcontroller.

1 22. The method as set forth in Claim 20 wherein at least one
2 of the ROM and the RAM comprises an external device coupled to the
3 microcontroller.

MULTITASKING MICROCONTROLLER FOR CONTROLLING THE
PHYSICAL LAYER OF A NETWORK INTERFACE CARD
AND METHOD OF OPERATION

ABSTRACT OF THE DISCLOSURE

5 There is disclosed an apparatus for controlling a physical
layer interface of a network interface card in real time. The
apparatus comprises: 1) a first memory for storing a multitasking
control program, the multitasking control program comprising a main
routine and a plurality of subroutines callable by the main
10 routine; 2) a second memory for storing a plurality of multitasking
vectors associated with the multitasking control program; and 3) a
microcontroller for executing the multitasking control program,
wherein program execution control is transferred from the main
routine to a first one of the plurality of subroutines when the
15 first subroutine is called by the main routine and wherein the
first subroutine, upon encountering a decision point in the first
subroutine that is not yet capable of being decided, updates a
first one of the plurality of multitasking vectors associated with
the first subroutine with an address of the decision point and
20 transfers program execution control back to the main routine.

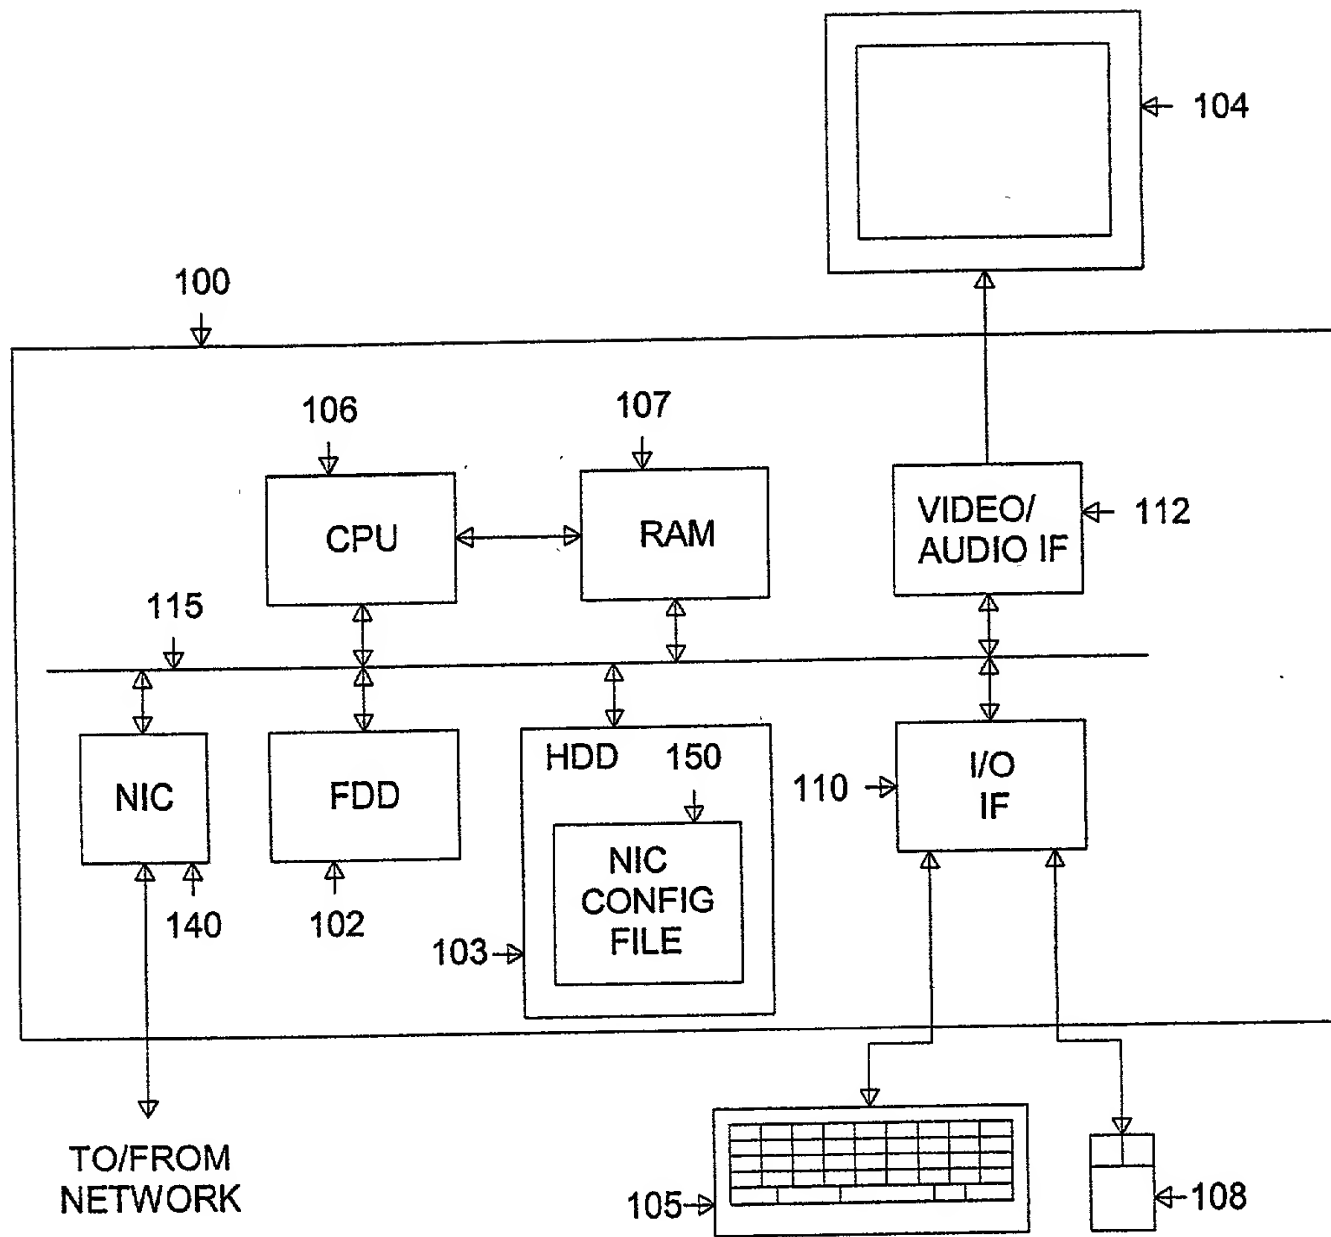


FIGURE 1

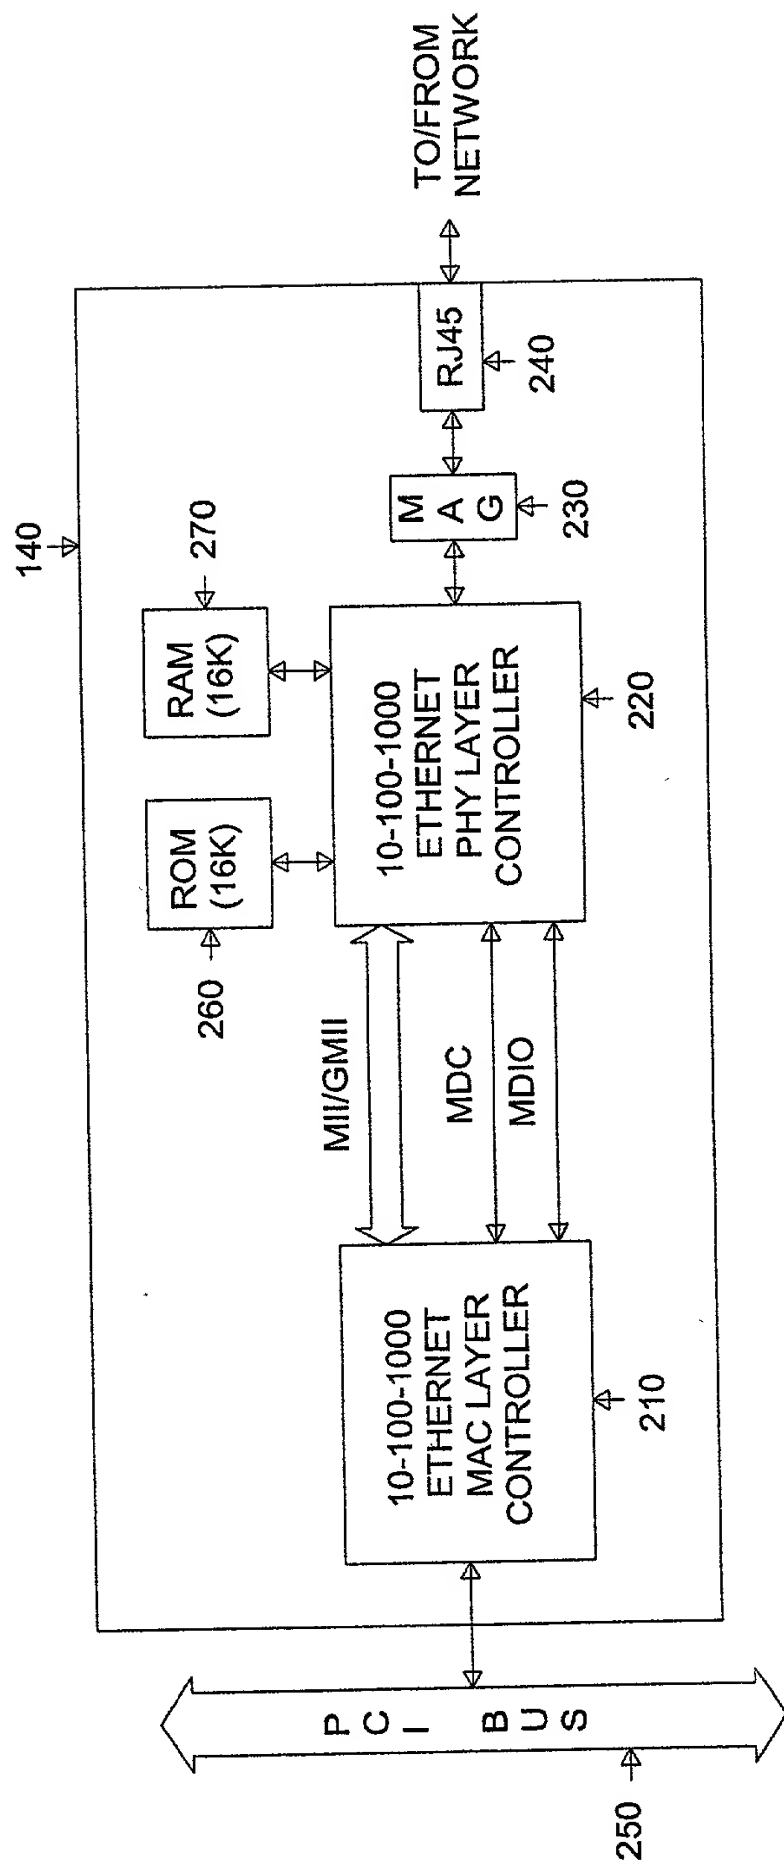


FIGURE 2

P04762
SHEET 3 OF 9

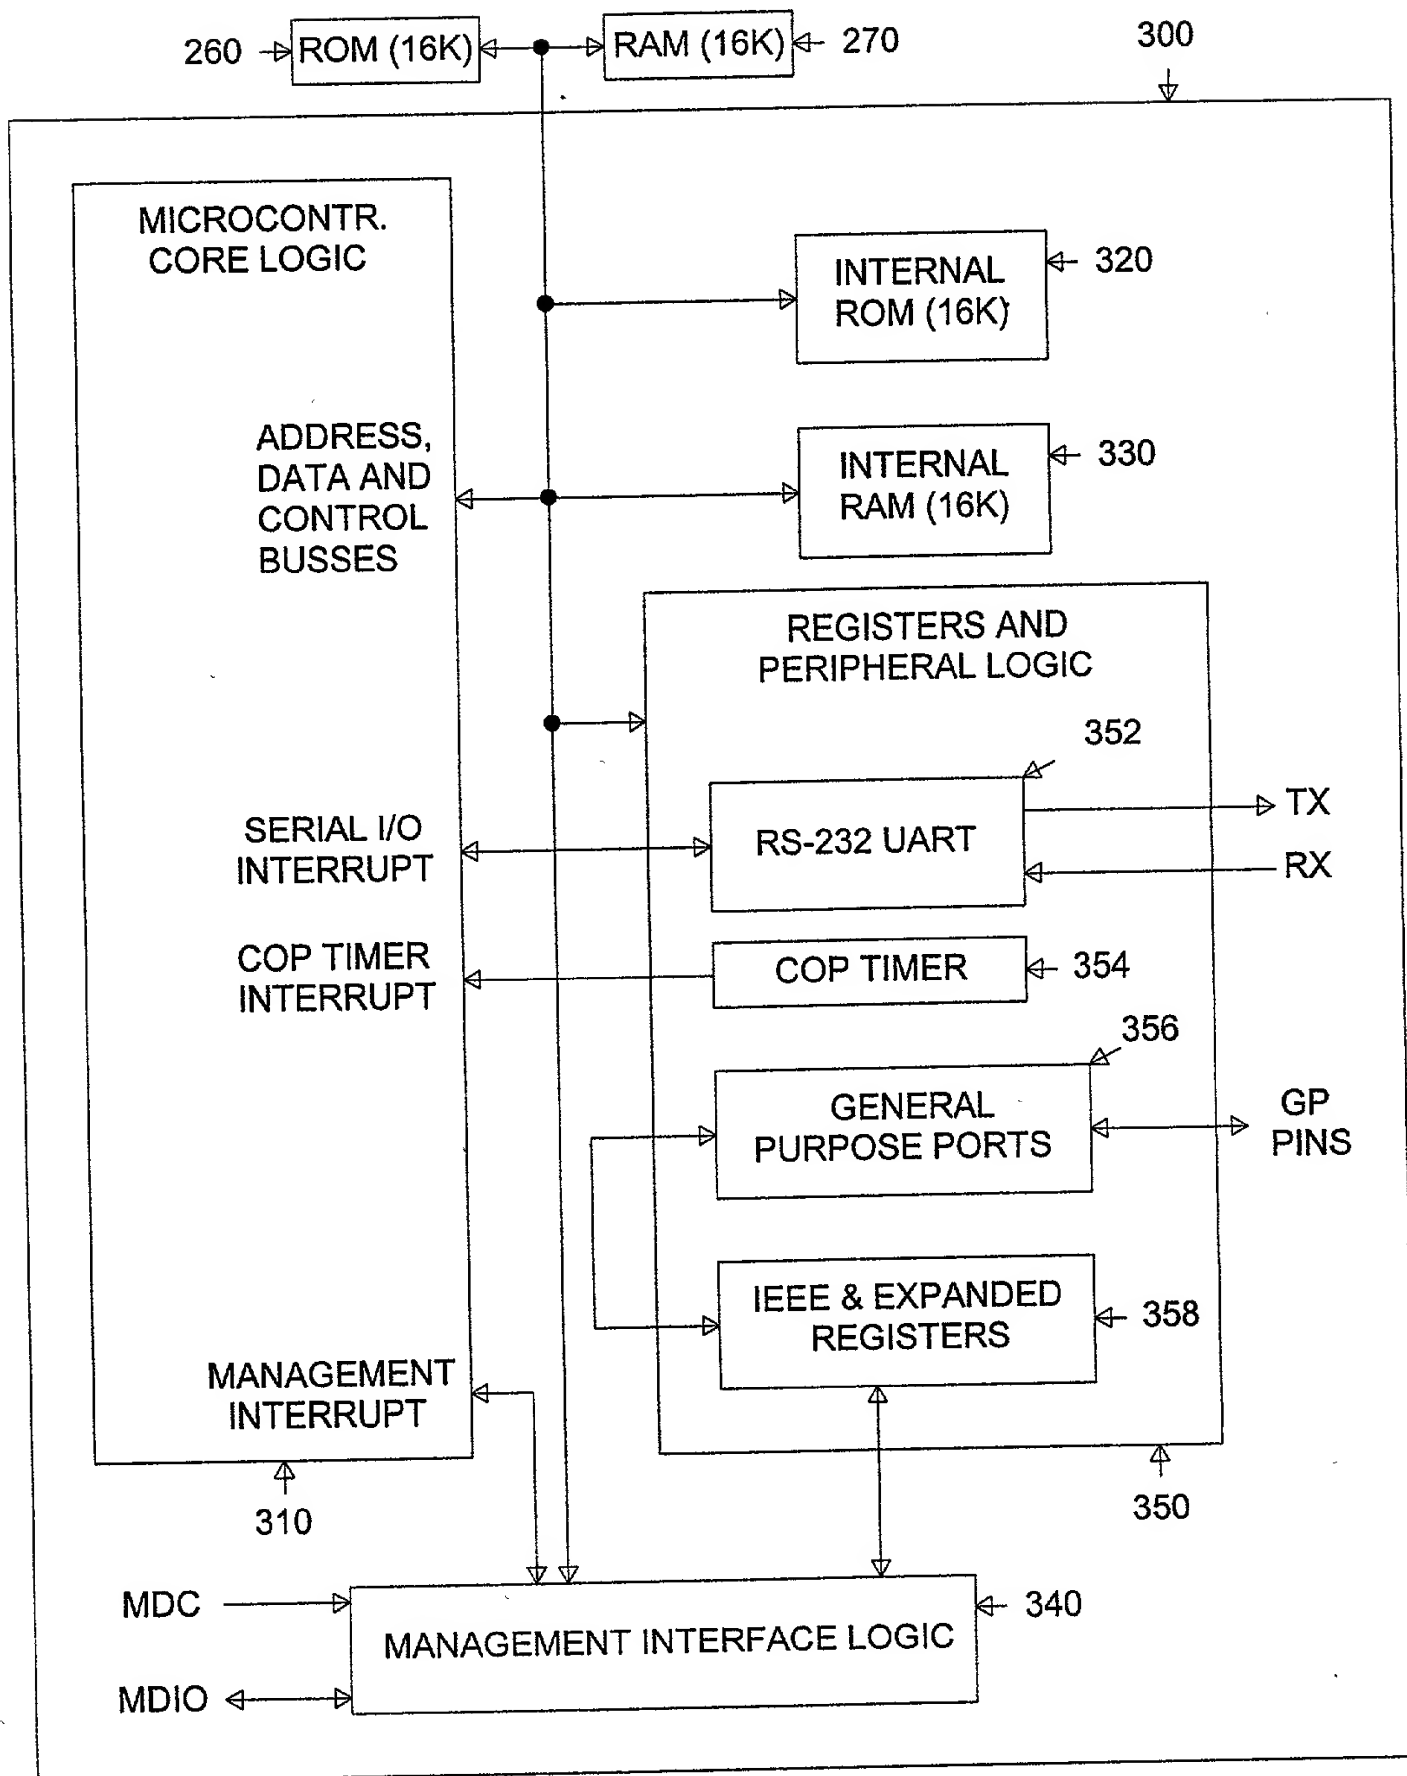


FIGURE 3



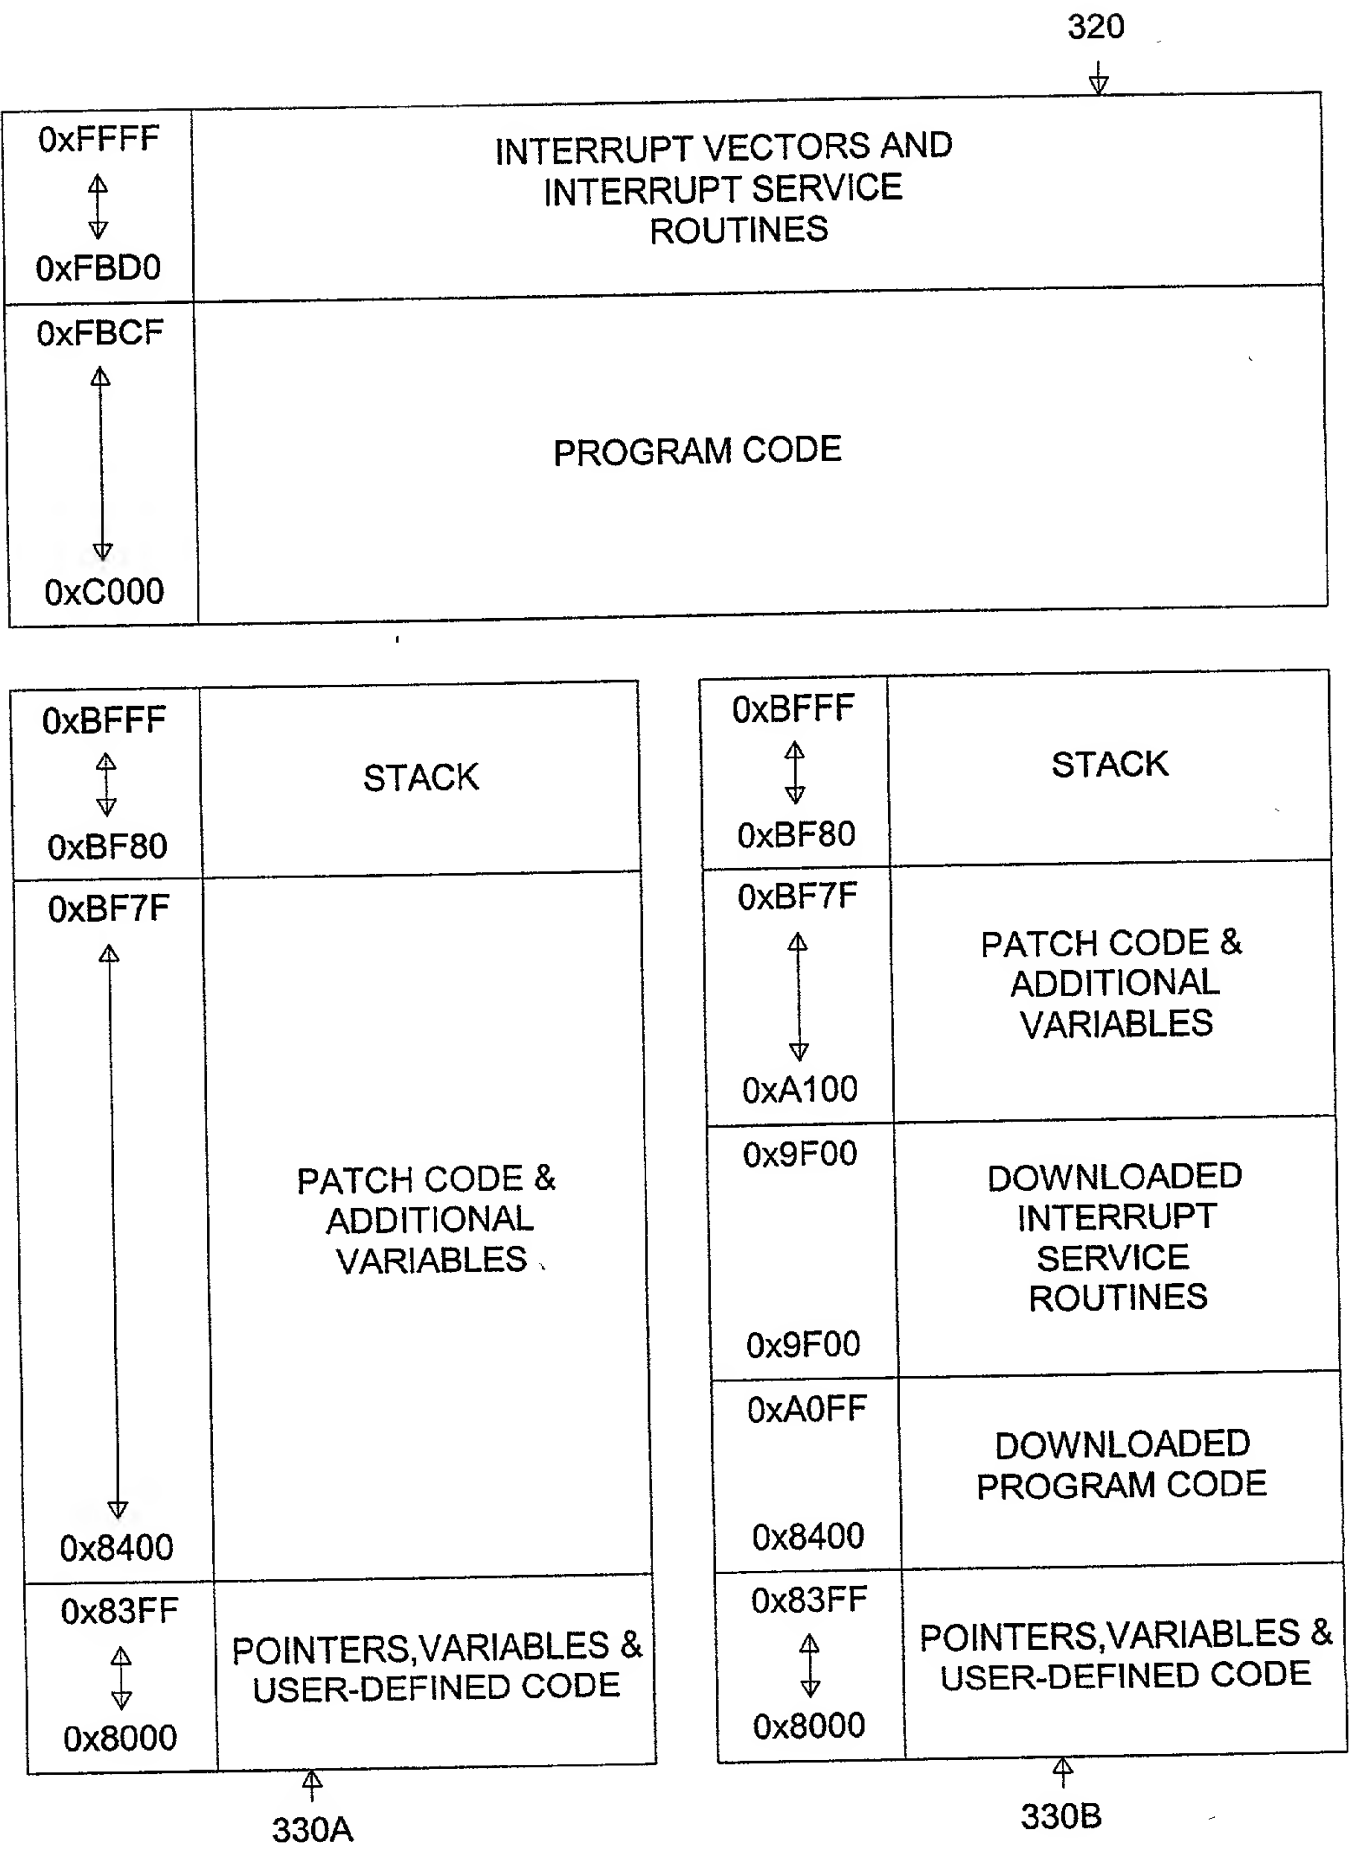


FIGURE 4

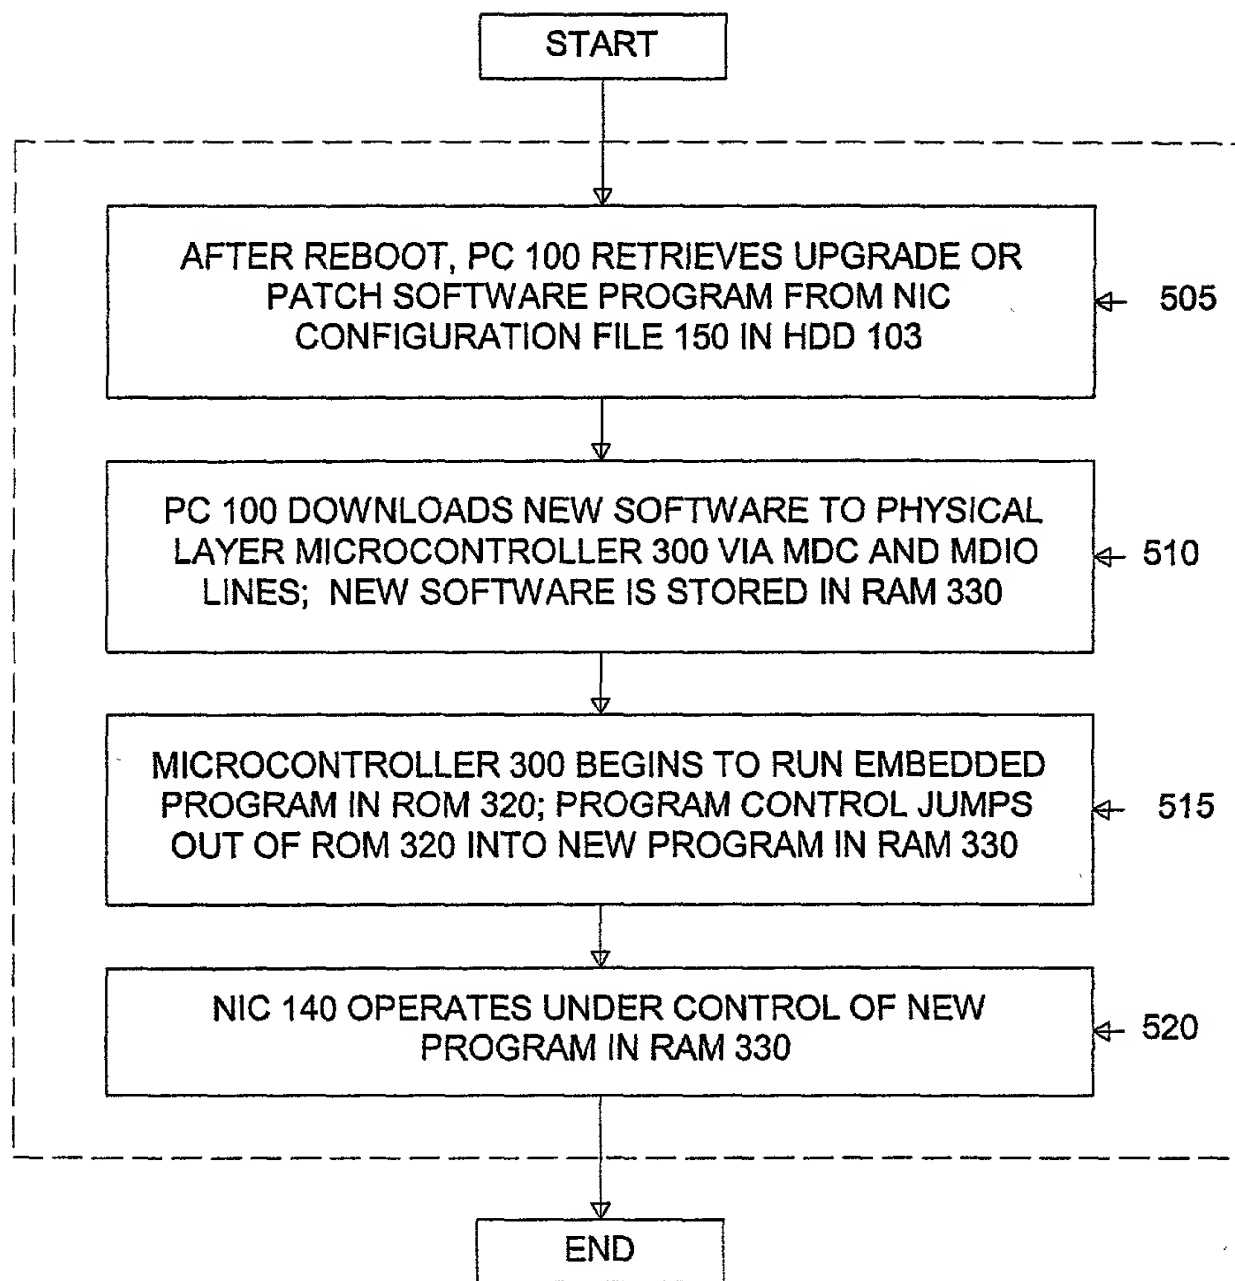

500

FIGURE 5

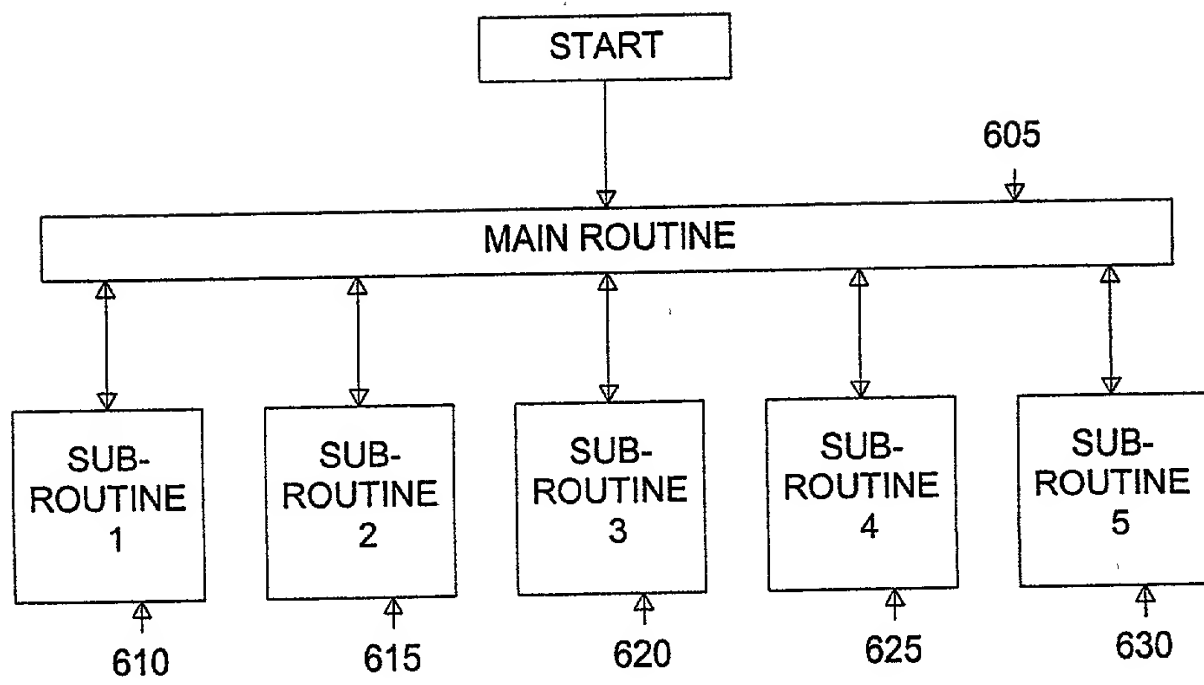

600 ↗

FIGURE 6

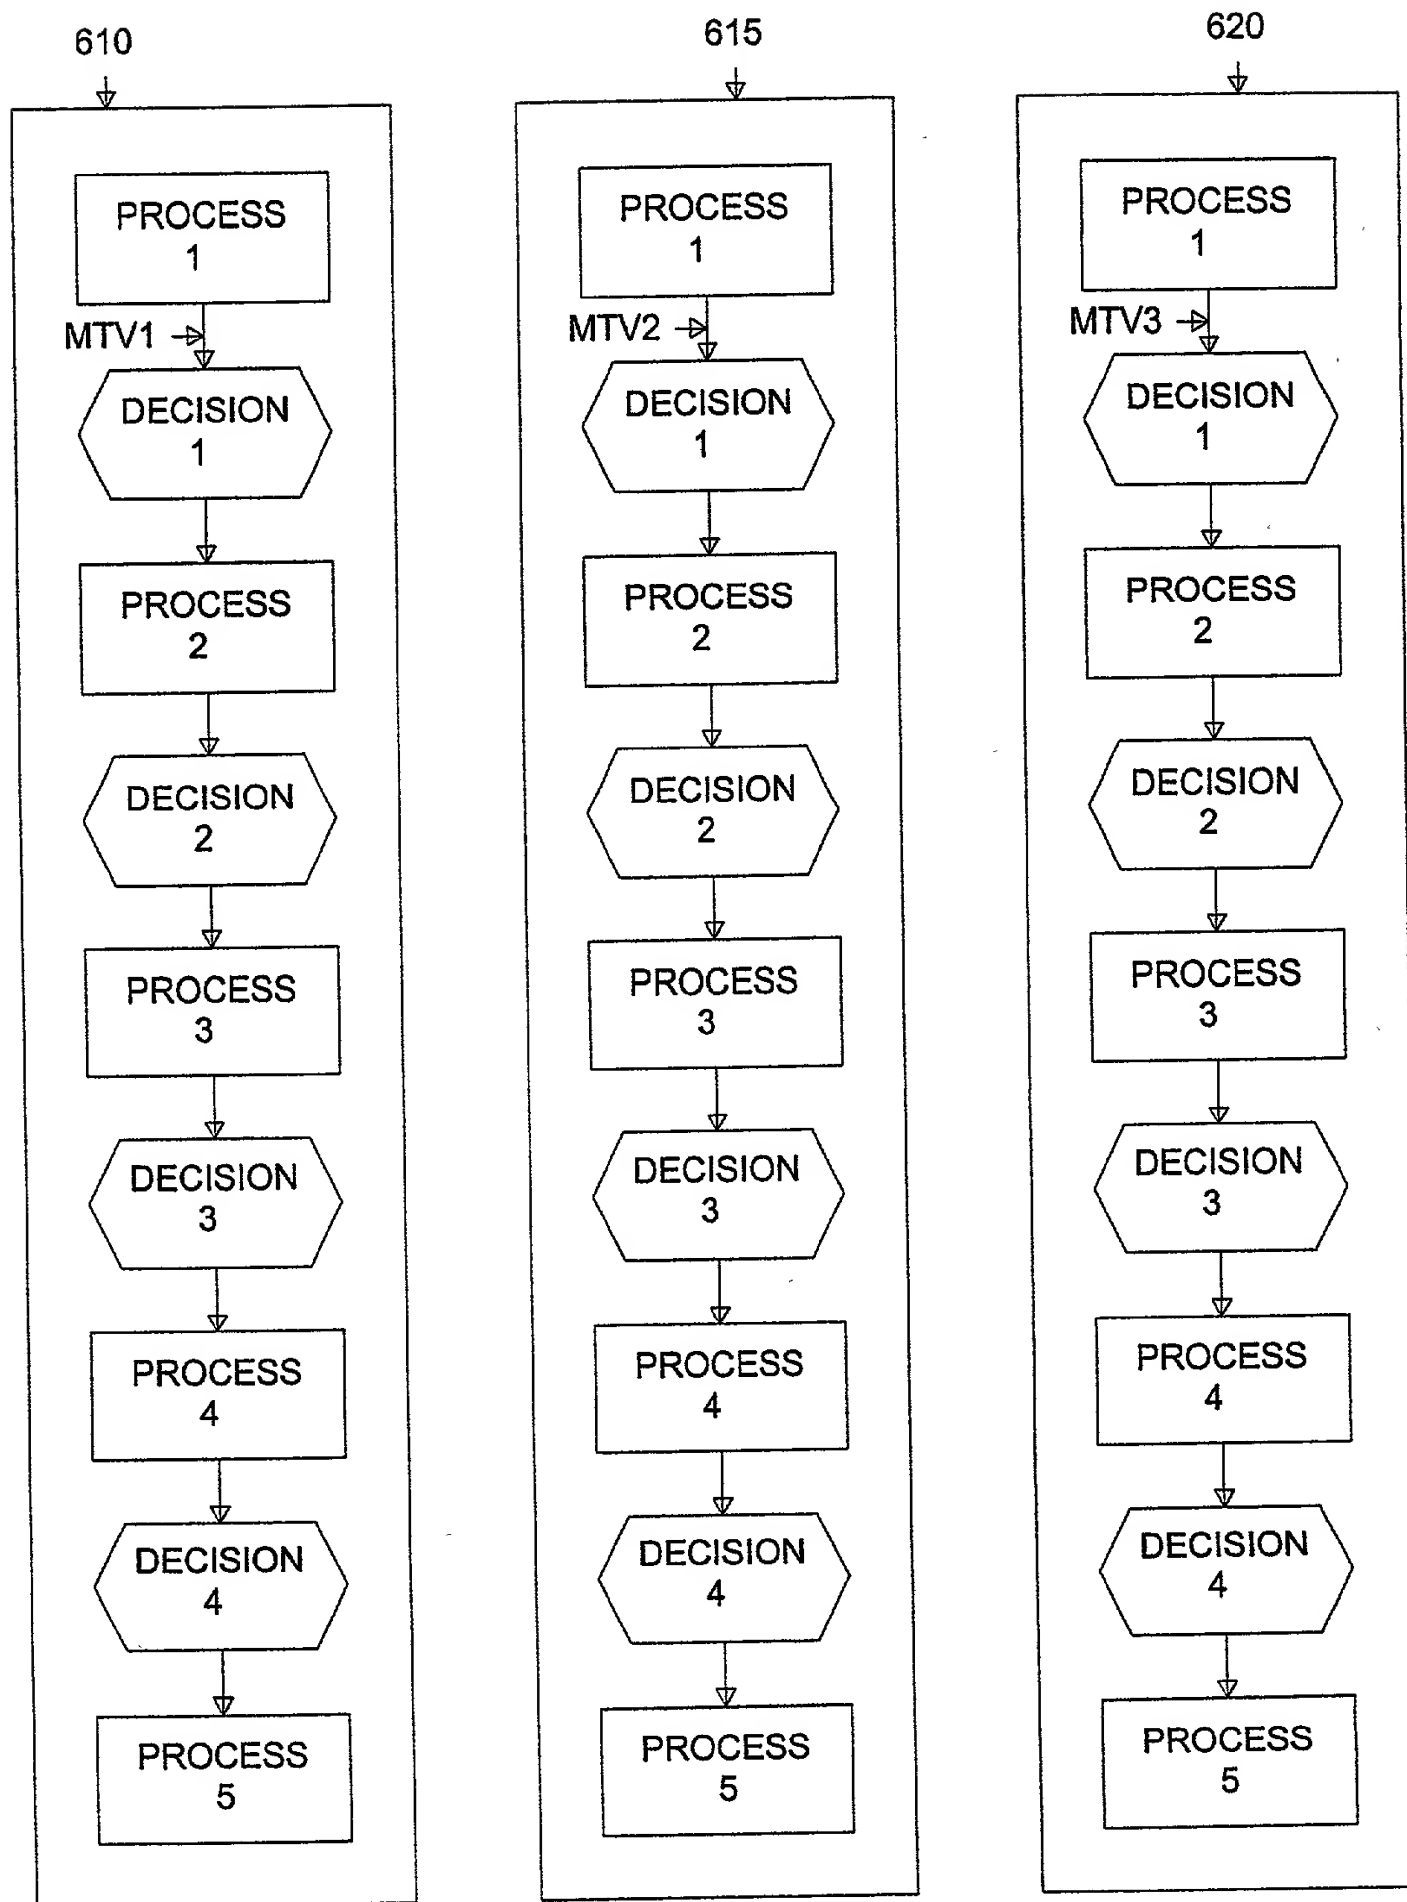


FIGURE 7

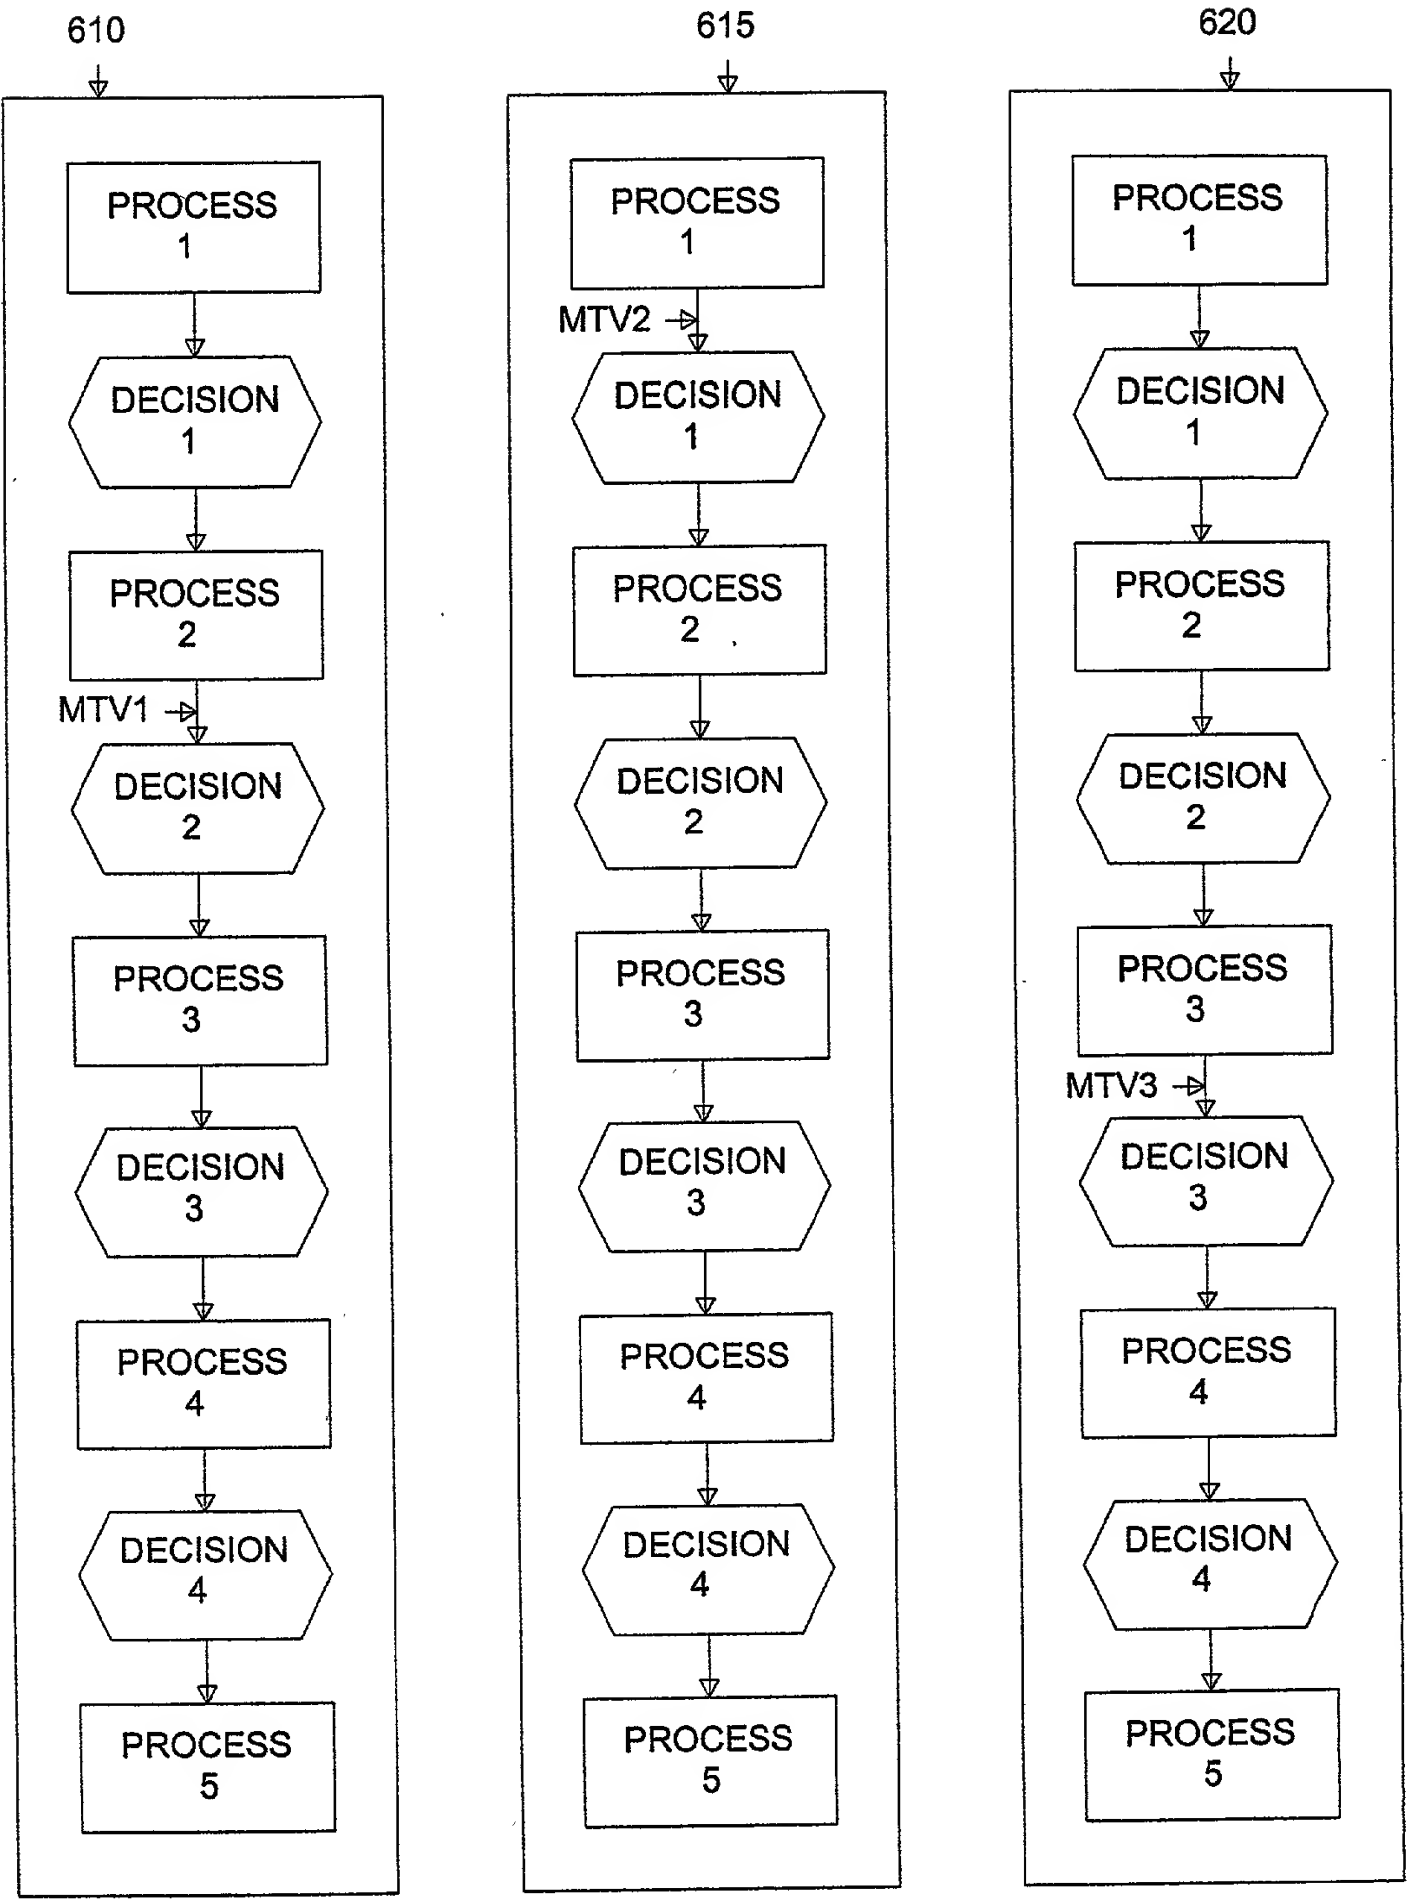


FIGURE 8

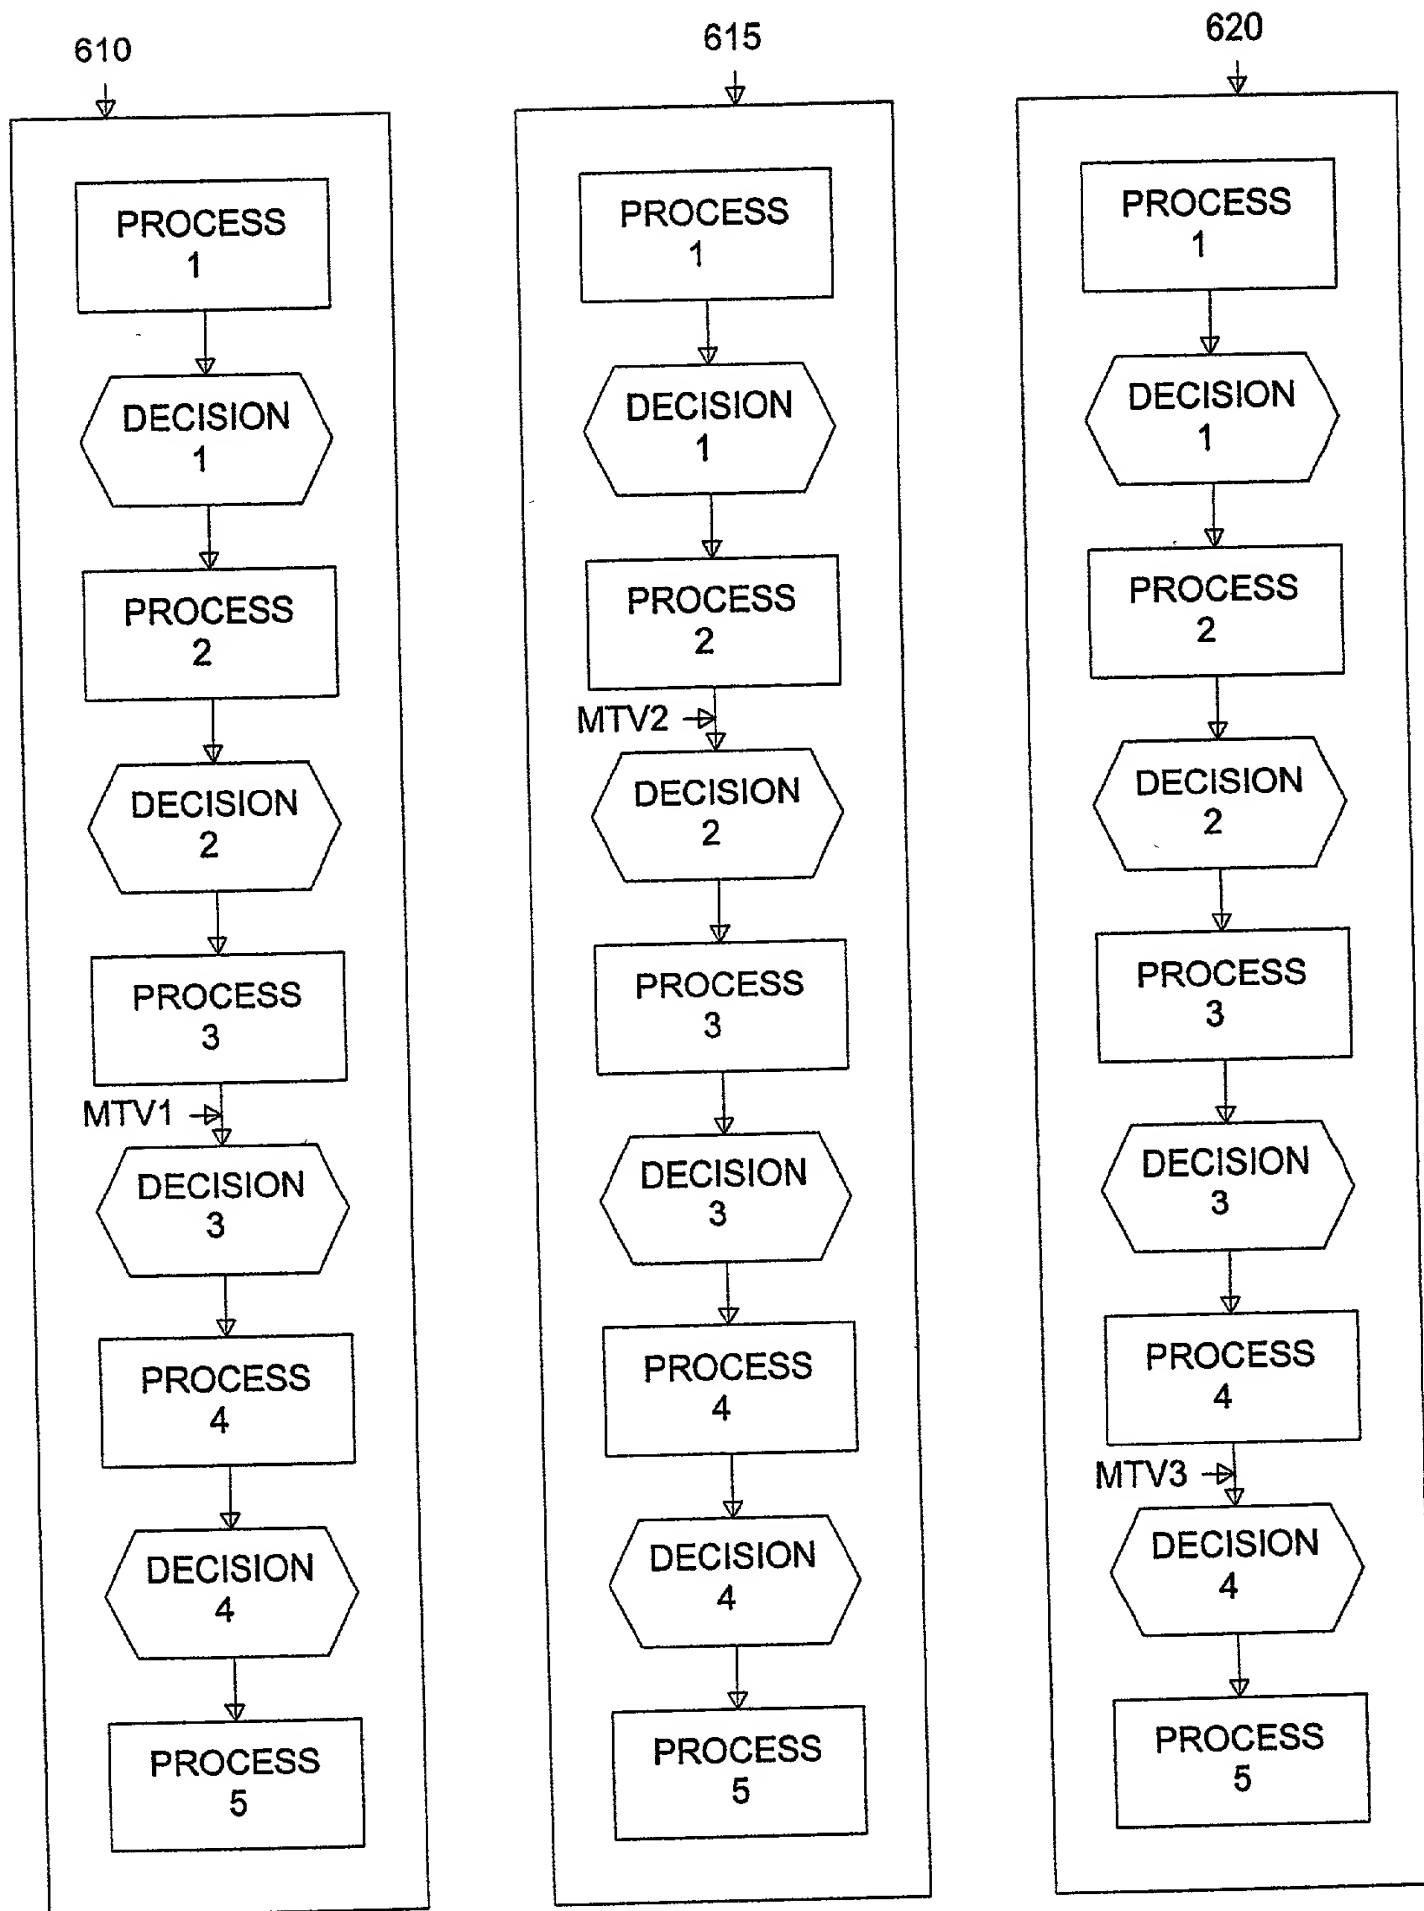


FIGURE 9

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	P04762
	First Named Inventor	Gavlik, et al.
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
Examiner Name		

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Multitasking Microcontroller for Controlling the Physical Layer of a Network Interface Card and Method of Operation

the specification of which (Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box →



PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number
Andrew S. Viger	28,552	William A. Munck	39,308
John L. Maxin	34,668	John T. Mockler	39,775
Christopher Byrne	32,204	Coleman F. Reif	38,593
Eugene C. Conser	39,149	Allen R. Tremain	40,207
Peter Y. Wang	40,452		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label ☒ Correspondence address below

Name	John L. Maxin				
Address	National Semiconductor Corporation				
Address	801 East Campbell Road, Suite 525				
City	Richardson	State	TX	ZIP	75081
Country	USA	Telephone	972-680-4523	Fax	972-680-4515

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname					
John E.		Gavlik					
Inventor's Signature				Date	11/14/00		
Residence: City	Oxnard	State	CA	Country	USA	Citizenship	USA
Post Office Address	2540 Greencastle Court						
Post Office Address							
City	Oxnard	State	CA	ZIP	93035-2901	Country	USA

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet Page 1 of 1

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Matthew J.				Webb			
Inventor's Signature	<i>M.L. Webb</i>			Date	11/14/00		
Residence: City	Woodland Hills	State	CA	Country	USA	Citizenship	UK
Post Office Address	5323 Baza Avenue						
Post Office Address							
City	Woodland Hills	State	CA	ZIP	91364	Country	USA
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Ted				Chang			
Inventor's Signature	<i>Ted Chang</i>			Date	11/14/00		
Residence: City	Oak Park	State	CA	Country	USA	Citizenship	USA
Post Office Address	5355 Oak Park Lane #170						
Post Office Address							
City	Oak Park	State	CA	ZIP	91377	Country	USA
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature				Date			
Residence: City		State		Country		Citizenship	
Post Office Address							
Post Office Address							
City		State		ZIP		Country	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.